


# MINE BURIAL IMPACT PREDICTION EXPERIMENT

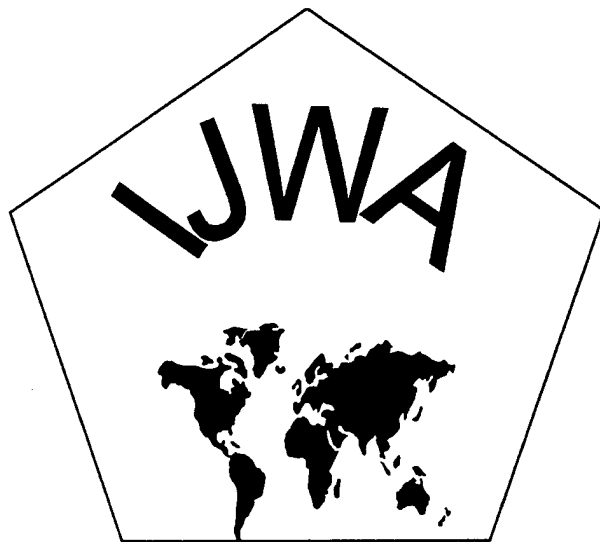

Peter C. Chu  
Timothy B. Smith  
Steven D. Haeger

**DISTRIBUTION STATEMENT A**  
Approved for Public Release  
Distribution Unlimited

The Institute for Joint Warfare Analysis  
Naval Postgraduate School  
Monterey, California

DTIC QUALITY INSPECTED 4

20001222 104

**NPS-IJWA-01-007**

# **MINE BURIAL IMPACT PREDICTION EXPERIMENT**

**Peter C. Chu  
Timothy B. Smith  
Steven D. Haeger**

INSTITUTE FOR JOINT WARFARE ANALYSIS  
NAVAL POSTGRADUATE SCHOOL  
Monterey, California


RADM David R. Ellison  
Superintendent


Richard Ester  
Provost


This report was prepared for and funded by:  
Naval Oceanographic Office

This report was prepared by:  
Institute for Joint Warfare Analysis  
Naval Postgraduate School  
Monterey, CA


Authors:

  
Peter C. Chu


  
Timothy B. Smith

  
Steven D. Haeger

Reviewed By:

  
GORDON E. SCHACHER  
Director  
Institute for Joint Warfare Analysis

Released by:

  
DAVID W. NETZER  
Associate Provost and  
Dean of Research

# REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instruction, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188) Washington DC 20503.

1. AGENCY USE ONLY  
(Leave blank)

2. REPORT DATE  
September 2000

3. REPORT TYPE AND DATES COVERED  
Master's Thesis

4. TITLE AND SUBTITLE  
MONTEREY BAY MINE IMPACT BURIAL EXPERIMENT

5. FUNDING NUMBERS

6. AUTHOR(S)  
Peter C. Chu, Timothy B. Smith, and Steven D. Haeger

N6230600PO00005

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)  
Naval Postgraduate School  
Monterey, CA 93943-5000

8. PERFORMING ORGANIZATION  
REPORT NUMBER  
NPS-IJWA-01-007

9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)  
NAVOCEANO, Stennis Space Center, MS 39522-5001

10. SPONSORING / MONITORING  
AGENCY REPORT NUMBER

## 11. SUPPLEMENTARY NOTES

The views expressed in this thesis are those of the author and do not reflect the official policy or position of the Department of Defense or the U.S. Government.

## 12a. DISTRIBUTION / AVAILABILITY STATEMENT

Approved for public release; distribution is unlimited.

## 12b. DISTRIBUTION CODE

## 13. ABSTRACT (maximum 200 words)

Mine Impact Burial Experiment (MIBEX) was conducted at Monterey Bay on May 23, 2000 using a simulated mine. During the experiment, we carefully observe mine track and mine burial depth while simultaneously take gravity cores. After analyzing the gravity cores, we obtain the bottom sediment shear strength data set. Such synchronous mine burial depth and shear strength data were used to evaluate the Navy's Impact Burial Prediction Model (IBPM) which creates a two-dimensional time history of a bottom mine as it falls through air, water, and sediment. The output of the model is the predicted burial depth of the mine in the sediment in meters, as well as height, area, and volume protruding. Model input consists of environmental parameters and mine characteristics, as well as parameters describing the mine's release. The MIBEX data show that the current IBPM model needs to be improved.

## 14. SUBJECT TERMS

Modeling and Simulation, Meteorology and Oceanography, METOC, Mine Impact Burial Prediction, Bottom Mine, Decision making

15. NUMBER OF  
PAGES  
160

16. PRICE CODE

17. SECURITY  
CLASSIFICATION  
OF REPORT  
Unclassified

18. SECURITY CLASSIFICATION OF  
THIS PAGE  
Unclassified

19. SECURITY CLASSIFI- CATION  
OF ABSTRACT  
Unclassified

20. LIMITATION OF  
ABSTRACT  
UL

## **ACKNOWLEDGEMENTS**

The work that lead to the results reported here was a partnership effort between the Naval Postgraduate School Institute for Joint Warfare Analysis, the Naval Oceanographic Office, Naval Research Laboratory, and the U.S. Geological Survey (USGS). Also involved were other organizations that provided personnel and equipment, too numerous to mention. We wish to acknowledge the following individuals who were responsible for making this research possible: Timothy Stanton and Andy Anderson at the Naval Postgraduate School; Homa Lee and Priscilla Barnes of the USGS in Menlo Park; and Phillips Valent at Naval Research Laboratory.

## **ABSTRACT**

Mine Impact Burial Experiment (MIBEX) was conducted at Monterey Bay on May 23, 2000 using a simulated mine. During the experiment, we carefully observe mine track and mine burial depth while simultaneously take gravity cores. After analyzing the gravity cores, we obtain the bottom sediment shear strength data set. Such synchronous mine burial depth and shear strength data were used to evaluate the Navy's Impact Burial Prediction Model (IBPM) which creates a two-dimensional time history of a bottom mine as it falls through air, water, and sediment. The output of the model is the predicted burial depth of the mine in the sediment in meters, as well as height, area, and volume protruding. Model input consists of environmental parameters and mine characteristics, as well as parameters describing the mine's release. The MIBEX data show that the current IBPM model needs to be improved.

# TABLE OF CONTENTS

I. INTRODUCTION.....	1
II. ENVIRONMENT OF THE MONTEREY BAY.....	7
A. GEOLOGY AND STRUCTURE.....	7
B. OCEANOGRAPHY .....	11
III. MIBEX AT THE MONTEREY BAY .....	19
A. PREPARATION .....	19
B. EXPERIMENT.....	23
IV. SEDIMENT DATA ANALYSIS .....	25
A. GRAVITY CORE ANALYSIS .....	25
B. SEDIMENT PROFILES.....	26
C. DENSITY – SHEAR STRENGTH RELATION.....	33
V. REAL/MISO DATA ANALYSIS .....	35
A. GENERAL INFORMATION OF REAL/MISO.....	35
B. REAL-TIME WAVE DATA .....	36
VI. MINE IMPACT BURIAL.....	39
A. HYDRODYNAMIC PROCESSES.....	39
B. MINE BURIAL DYNAMICS.....	40
VII. MODEL DATA COMPARISON .....	43
A. MODEL DESCRIPTION .....	43
B. MODEL DATA COMPARISON.....	44
VIII. CONCLUSION.....	47
LIST OF REFERENCES .....	51
INITIAL DISTRIBUTION LIST .....	53
APPENDIX I.....	55
APPENDIX II.....	59

# LIST OF FIGURES

Figure 1. The trajectory of a cylindrical mine as it falls through three phases: air, water, and sediment. Labels are parameters used by the model to calculate the velocity, attitude, and burial depth of the mine.....	3
Figure 2. The Monterey Bay National Marine Sanctuary.....	4
Figure 3. AVHRR infra-red image of sea surface temperature along the central California Coast. 12 June 1993.....	13
Figure 4. AVHRR infra-red satellite image of sea surface temperature 28 April 1993. This image is not typical of temperature distributions in the California Current..	14
Figure 5. Near-surface salinity distributions a) 14-15 Dec. 1972; b) 25-26 Jan 1973; c) 22-23 Feb 1973; d) 22-23 Mar 1973. (Broenkow and Smethie 1978).....	15
Figure 6. The initial experiment site.....	19
Figure 7. R/V John Martin, MBARI.....	21
Figure 8. Andy Andersen getting the "mine" ready. (May 22, 2000).....	22
Figure 9. Gravity Cores in rack.....	23
Figure 10. Fall Cone Apparatus Model G – 200.....	26
Figure 11. Density Vs. Depth For Cores 1-3, 5.....	27
Figure 12. Density Vs. Depth For Cores 6-9.....	28
Figure 13. Density Vs. Depth For Cores 10-12.....	29
Figure 14. Shear Strength Vs. Depth For Cores 1-3, and 5.....	30
Figure 15. Shear Strength Vs. Depth For Cores 6-9.....	31
Figure 16. Shear Strength Vs. Depth For Cores 10-12.....	32
Figure 17. Shear Strength Vs. Density analyzed on June 1, 2000.....	34
Figure 18. Phase 1 R.E.A.L. Implementation.....	36
Figure 19. Hsig Vs. Yearday during the period of the experiment.....	37
Figure 20. Measured versus Impact Burial Model output for May 23, 2000.....	44



## **LIST OF TABLES**

Table 1: Measuring range of Fall Cone Apparatus Model G –200.....	25
Table 2: IMPACT 25 Model Input Parameters.....	45

## TABLE OF SYMBOLS

$\Lambda_s$	=	Kinematic viscosity of the sediment
$\Lambda_w$	=	Water viscosity
$\Delta_s$	=	Density of the sediment
$F_b$	=	Buoyancy Force
$F_c$	=	Compressive force
$F_d$	=	Drag Force
$F_s$	=	Shear force
$F_{w,a}$	=	Force due to weight of air on mine
$h$	=	Penetration depth (cm)
$K$	=	Constant depending on cone angle
$M_r$	=	Resultant Mass
$Q$	=	Weight (grams)
$\rho$	=	Density ( $\text{kg/m}^3$ )
$V$	=	Velocity
$s$	=	Undrained shear strength
$S_u$	=	Shear strength

# **I. INTRODUCTION**

Since the conclusion of the cold war, emphasis has been shifted from blue-water, open ocean battle tactics to littoral warfare. It is in this arena that mine warfare has become an all-important issue. Mine warfare is one of most cost efficient ways to protect critical waterways and inflict serious damage upon a fleet. The fear inflicted upon an enemy fleet after knowledge of the presence of mines is a psychological bonus that enhances their effectiveness as a weapon. Many mines are of the same design as their counterparts from thirty or forty years ago. Their simplicity, effectiveness, and cost efficiency make them an appealing weapon for third world countries.

There are hundreds of variations of mines and they are triggered various ways. In 1776, an American, David Bushnell, who is also recognized as the inventor of America's first submarine, invented the first known sea mine. Bushnell's mine was a simple watertight wooden keg, loaded with gunpowder, which hung from a float and, at that time, was called a torpedo. In 1777, under orders from General Washington, a number of the kegs were set adrift by Bushnell in an attempt to destroy a fleet of British warships anchored in the Delaware River off Philadelphia. The attempt failed. But the naval mine has since - through the American Civil War, World Wars I and II, and the Korean and Southeast Asian Conflicts - gained a reputation as one of the Navy's least costly, yet most effective, offensive and defensive weapons.

Modern times have not changed the value placed on mines. Although technology has improved and new and more effective mines have been invented, many third world countries still employ mines of the simplest design. Mine detection capability is now in the spotlight.

Mines are deployed one of three ways: Aircraft, sea surface, or subsurface. Mines will float on the surface through inherent buoyancy, float just below the surface using some sort of anchoring mechanism or lodge themselves in the sea bottom. They can detonate by contact, disruption of a magnetic field, or by acoustic detection. For the mines which imbed themselves in the sea floor, the sensitivity of the mine trigger is directly proportional to the amount of the mine protruding from the sea floor. Because of this, it is important to be able to predict the burial depth of the mine depending upon deployment platform, sediment type and oceanographic conditions.

Chu et al. (2000) reviewed the current status of current numerical models for simulating the mine burial process and constituting the viable means for burial depth prediction. These models provided some information for clearing an area of mines. However, the Impact Burial (IB) model was developed to determine the depth at which the mine comes to rest in the sediment upon impact and at which only the momentum equations of the mine gravity center is considered (Arnone and Bowen, 1980). The IB model was designed to create a two-dimensional time history of a cylindrical mine as it falls through air, water, and sediment phases (Figure 1). The burial depth of the mine in the marine sediment is then calculated from the mine's velocity on contact with the sediment and the sediment characteristics. Several revisions have been made to the model to refine the physics and allow for more realistic geometry and more extensive input from the user. Most notable are the changes made by Satkowiak (1987) and Hurst (1991). Other revisions involved translating to newer computer language. Currently, the model allows the user to input nearly any value for each environmental parameter.

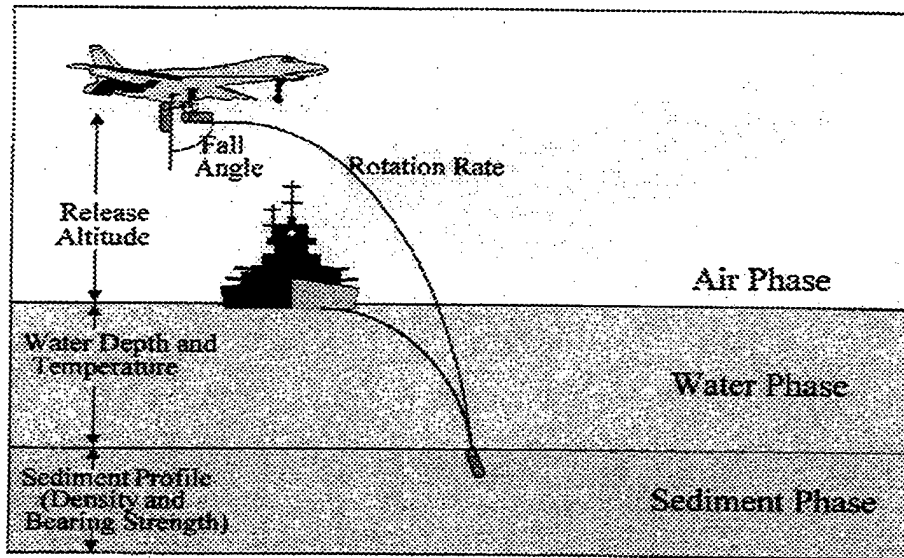


Figure 1. The trajectory of a cylindrical mine as it falls through three phases: air, water, and sediment. Labels are parameters used by the model to calculate the velocity, attitude, and burial depth of the mine. (From Arnone and Bowen, 1980)

The most popular IB model is IMPACT25. The altitude from which the mine is released determines the velocity and attitude of the mine as it reaches the air-water interface. IMPACT25 simulates one of the two kinds of mine motion: (1) falling downward without any rotation around its gravity center, and (2) "tumbling" with a constant rate of rotation. The attitude of the mine upon reaching the water is impacted greatly by the release altitude. Although not accounted for in the model, this rotation rate may be caused or affected by wind.

In the water phase, this rotation rate is damped significantly. However, it still has a great effect on the angle the mine makes with the sediment upon impact. Currents may affect the rotation rate in the model, but again are not accounted for in the model. The water depth only has an effect on impact velocity if it is less than that required for the

mine to reach terminal velocity, the velocity at which the deceleration due to frictional drag is equal to the acceleration from gravity. The velocity at which this equilibrium is reached is a function of the weight of the mine. Since mines are laid in shipping channels almost exclusively, one may assume that water depths in excess of that required for a mine to reach terminal velocity are the norm. Water temperature has an effect on the viscosity of seawater, and hence increases the drag of the seawater on the mine.

Data input for the IMPACT25 model can be split into two categories. The first category is rudimentary deployment and oceanographic water column data. The second category is more detailed sediment data. Penetration depth predictability is going to depend directly on impact velocity, and sediment density and shear strength values. The model puts sufficient emphasis in the utilization of sediment parameters but idealistic conditions for predicting impact velocity.

The output of the model is in question due the instability of ocean sediment. Until this experiment was conducted, dated sediment values were used when running the code that led to skepticism in the validity of it's output. Changes in the water column due to turbulence and currents above an impact area have a significant effect on sediment characteristics in the upper layers. These same changes in the water column have a direct effect on the impact velocity and orientation and are not addressed by the model. Sensitivity studies (Taber 1999; Chu et al. 2000) indicate the importance of the environment; especially on the bottom shear strength in the mine impact burial.

Before transferring the IMPACT25 model for naval operation use, we should verify the model using synchronous mine impact burial and environmental data. Unfortunately, it is very hard to find such a data set. The current data sets are either the

mine data or the environmental data only. It is therefore a high priority to collect the data for the evaluation of the IMPACT25 model.

This thesis includes three parts: (1) collecting synchronous mine impact burial and environmental data through the Mine Impact Burial Experiment (MIBEX) at Monterey Bay, (2) analyzing the real-time environmental data collected at the Rapid environmental Assessment Laboratory (REAL), and (3) evaluating IMPACT25 using the MIBEX data.






## II. Environment of the Monterey Bay

### A. Geology and Structure

The experiment was conducted in the Monterey Bay National Marine Sanctuary (MBNMS) off the central coast of California. The location was chosen because of its accessibility and the oceanographic data collection capability already in place. The MBNMS spans nearly 10,000 km<sup>2</sup> in the central California region, and extends offshore an average distance of approximately 50 km (a maximum distance of nearly 100 km in the Monterey Bay area and a minimum distance of 15 km off Partington Point) between the Farallon Islands in the north and Morro Bay in the south (Figure 1).

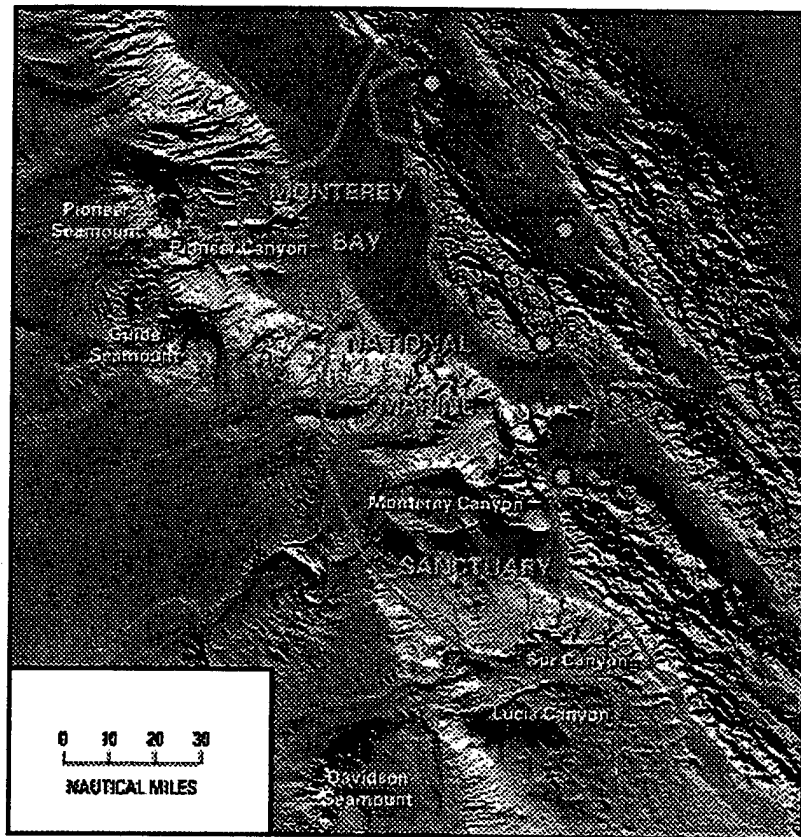

*Figure 2. The Monterey Bay National Marine Sanctuary*

It contains one of the world's most geologically diverse and complex seafloors and continental margins. The MBNMS is located on a plate boundary, which separates the North American Plate from the Pacific Plate, and is marked by the San Andreas fault system. This is an active tectonic region with common occurrences of earthquakes, submarine landslides, turbidity currents, flood discharges and coastal erosion. It is also a region of extensive natural and economic resources.

Coastal topography varies greatly, encompassing steep bluffs with flat-topped terraces and pocket beaches to the north; large sandy beaches bordered by cliff and large dune fields mid-sanctuary; and predominately steep, rocky cliffs to the south. Low- to high-relief mountain ranges and broad, flat-floored valleys are prevalent farther inland.

The Santa Cruz and Gabilan mountain ranges dominate the topography in the northern and central half of the region. Two major rivers (San Lorenzo and Pajaro Rivers) and a major creek (Scott Creek) enter Monterey Bay from these highlands through well-defined valleys (Figure 2). Elkhorn Slough, an old river estuary that today is occupied only by tidal salt marshes, extends inland from Moss Landing for more than 10 km. The broad, extensive Salinas Valley and the northern Santa Lucia Range are the dominant topographic features in the southern half of the region; the Salinas River is the major drainage system (Figure 2). South of Monterey, the west flank of the Santa Lucia Range drops abruptly into the ocean. Here, the valleys of the Carmel and Little Sur Rivers are dominant topographic features. From Point Sur to Morro Bay many streams and creeks drain the southern Santa Lucias and cut the steep western face of the mountain range.

The MBNMS is located along the active transform boundary (the San Andreas fault

system) separating the Pacific Plate from the North American Plate. Here the fault system is over 100 km wide and incorporates faults in the offshore, including those of the Palo Colorado-San Gregorio and Monterey Bay fault zones. These fault zones are seismically active, and in many places offset the seafloor or Quaternary sedimentary rocks. A paleo-subduction zone occurs along the MBNMS western boundary; the fossil thrust faults in this zone appear to control the structure at the base of the continental slope.

Most of the northern and central parts of the MBNMS lie within the Salinian block. It is composed of allochthonous (i.e. transported to local region) Cretaceous granitic basement material, primarily overlain with Neogene marine sedimentary units; it has been tectonically slivered into its present position. This block has been carried upon the Pacific Plate as the plate moves northward, slipping along the San Andreas fault for about the past twenty one million years.

In the Monterey Bay region, the plate boundary between the North American and Pacific plates is comprised of the San Andreas fault system, consisting of the Hayward-Calaveras and San Andreas fault zones on land, and the offshore Palo Colorado-San Gregorio fault zones. The Palo Colorado-San Gregorio is the major active fault zone within the MBNMS. It is a right-lateral strike-slip fault zone oriented generally north-south, comprised of two or more parallel and fairly continuous fault segments that extend at least 100 km from Point Año Nuevo in the north to Garrapata Beach (10 km north of Point Sur). The amount of right-lateral offset along this fault zone has been measured by different methods and at several locations; offset varies from 80-90 km to as much as 150 km.

The Monterey Bay fault zone is a wide (~10 km), en echelon (i.e. composed of short,

discontinuous, offset, roughly parallel faults) formation comprised of many fault segments ranging from 5 km or less up to 15 km in length. The Monterey Bay fault zone is either truncated or merges with the San Gregorio fault segment of the Palo Colorado-San Gregorio fault zone.

Monterey Canyon, the most dramatic submarine feature of the sanctuary, rivals the Grand Canyon in relief and topographic complexity. Monterey Canyon ranks among the larger canyons of the world and has a richness of life that exceeds that of most land and marine areas. The marine sanctuary, about 7,500 square kilometers of ocean and seafloor off central California, is home to a rich diversity of marine life. More than 30 species of marine mammals live in or visit the Bay, making it one of the largest collections in the northern hemisphere. For example, Bairds Beaked Whale navigates the canyon to make infrequent surface visits to the Bay. The sanctuary is rich in marine life because nutrient-enriched seawater upwells along the steep margin from deeper, colder waters.

Sediments derived from land accumulate in the marine environment, often at a temporary location awaiting a large storm, strong currents, or a quick shake from an earthquake to send them cascading down the canyon. The region is tectonically active, a fact underscored by the 7.0-magnitude Loma Prieta earthquake in 1989. Much has been learned from that event, including indications that the style of faulting may be significantly different than previously thought. Such differences have implications for how rocks move and react to shock waves, which, in turn, influence the size of earthquakes. Further studies are needed to determine how these rocks are packaged, how

the packages move, and what effect that movement has on the seafloor and adjacent coast.

Sediments deposited on the shelf are affected by winter storms, which resuspend particles and transport them to new locations. For example, giant landslides and currents of turbid materials occur in Monterey Canyon when waves or earthquakes destabilize huge piles of sediment at the head of the canyon. These slides and flows are well documented, but the extent of movement is not well known. Recent mass movements of sediments have moved electronic instruments on the seafloor miles down the canyon. Movement of sediments along the coast and their ultimate accumulation more than 300 kilometers from the shore are topics of study requiring a long-term research commitment.

## **B. Oceanography**


The oceanography of the Monterey Bay National Marine Sanctuary (MBNMS), including Monterey Bay and the coastal area between the Gulf of the Farallones and Point Piedras Blancas, is closely tied to processes of the California Current. The California Current is an eastern boundary current that has been characterized generally as a broad, shallow, slow southward moving current exhibiting high spatial and temporal variability. The California Current is the eastward portion of the clockwise North Pacific Gyre and transports low salinity, cool water equatorward. Associated with the coastal surface flow is a poleward undercurrent, the California Undercurrent. Even though the California Current is one of the most-studied oceanographic features in the oceans, it is difficult to predict at any particular instant the location of its velocity core, its speed, or direction. Indeed, at various locations observers might characterize the current as south

flowing (as it often is in offshore regions), westward flowing (as is frequently observed in a coastal jet near Point Reyes), or eastward flowing (as found in the southern regions of such jets). At times, principally in winter, the nearshore current flows northward.

The California Current can be divided into three regions (based on the seasonal amplitude variation and standard deviation of dynamic height): an offshore oceanic regime, a coastal regime and an intervening transition zone. This transition zone lies approximately 200-300 km west of Point Sur. Geostrophic speeds in the core of the California Current may approach 25 cm/s, but generally are 5 to 10 cm/s (0.1 to 0.2 knots). Infrared AVHRR (Advanced Very High Resolution Radiometer) satellite images clearly show surface effects of such eddies and the presence of coastal jets (Figure 3). The core of the California Current lies in the salinity minimum about 300 km offshore of Point Sur, within the transition zone, and is not associated generally with a thermal gradient. This makes location of the California Current difficult from infrared imagery (Figure 3). The low salinity waters derive generally from the low salinities in the Gulf of Alaska and more locally from the Columbia River discharge and outflow from the Sacramento and San Joaquin Rivers through the mouth of San Francisco Bay.

The California Current is richly populated with semi-stationary jets and eddies. Satellite imagery (Figure 3 and Figure 4) has shown cold filaments on the order of 50 km wide to extend several hundred km offshore. The importance of these features, which represent the highly variable oceanographic "weather" of the California Current, lies in their offshore transport of cool, nutrient-rich upwelled water. This extends the effects of nearshore upwelling which is confined to a band about 50 km wide to several hundred


km. Cross-shore velocities may reach 1 m/s which is an order of magnitude greater than characteristic speeds of the California Current core. In what are called "squirts," the flow

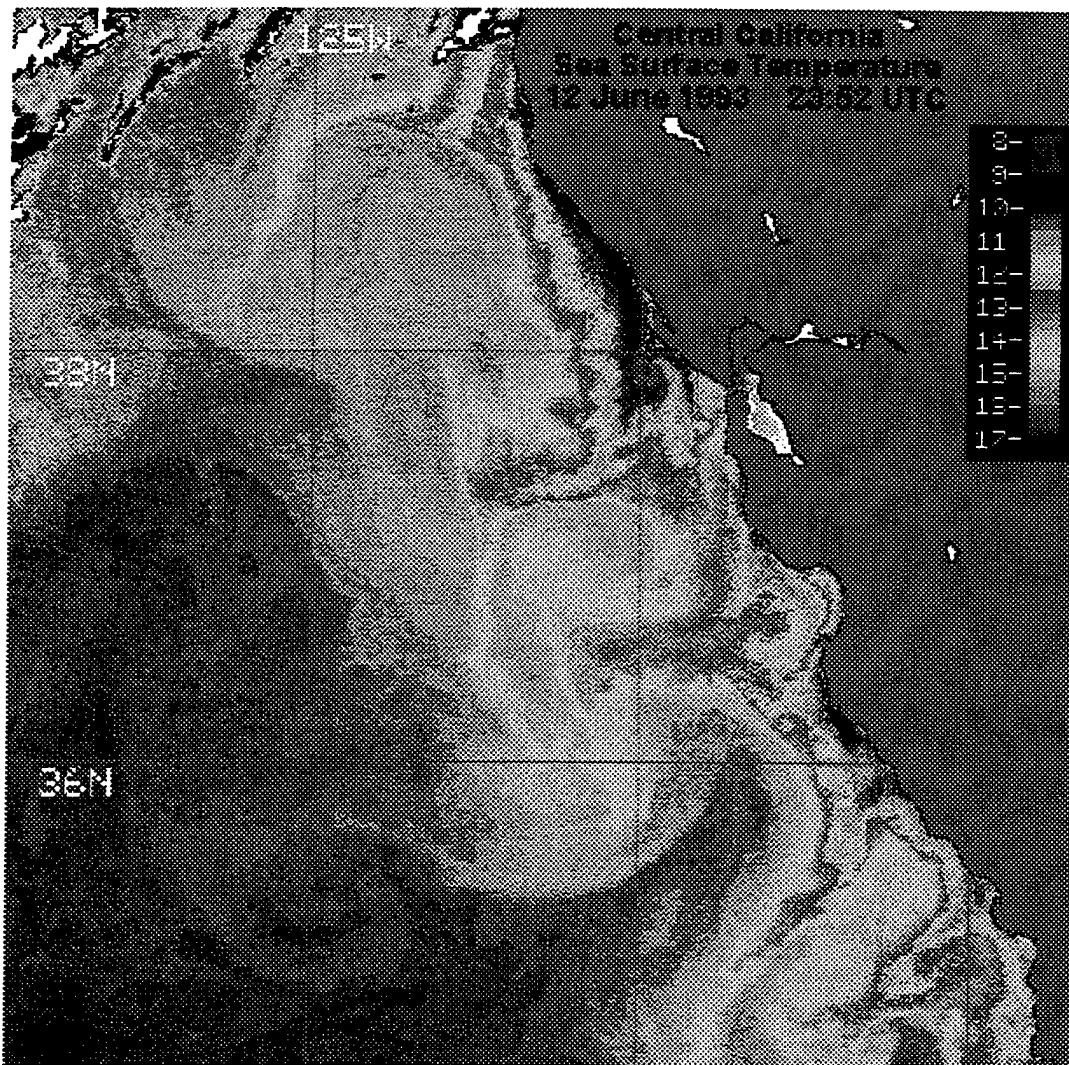

*Figure 3. AVHRR infra-red image of sea surface temperature along the central California Coast. 12 June 1993*

may be directed offshore, and where the "squirt" dissipates elongated "hammerhead" features evolve (Figure 3). Between mesoscale eddies, the flow is directed offshore north of cyclonic eddies and onshore south of them. A jet may be found off Point Sur that transports cool, upwelled waters offshore 100 km. The "San Francisco Eddy" is a semi-permanent cyclonic eddy northwest of Monterey Bay, while other observations describe

anti-cyclonic eddies in this region. Current meter measurements and estimated geostrophic flow in an anti-cyclonic eddy southeast of Monterey Bay. Between that eddy and a cyclonic eddy just north of it strong onshore geostrophic flow was observed.

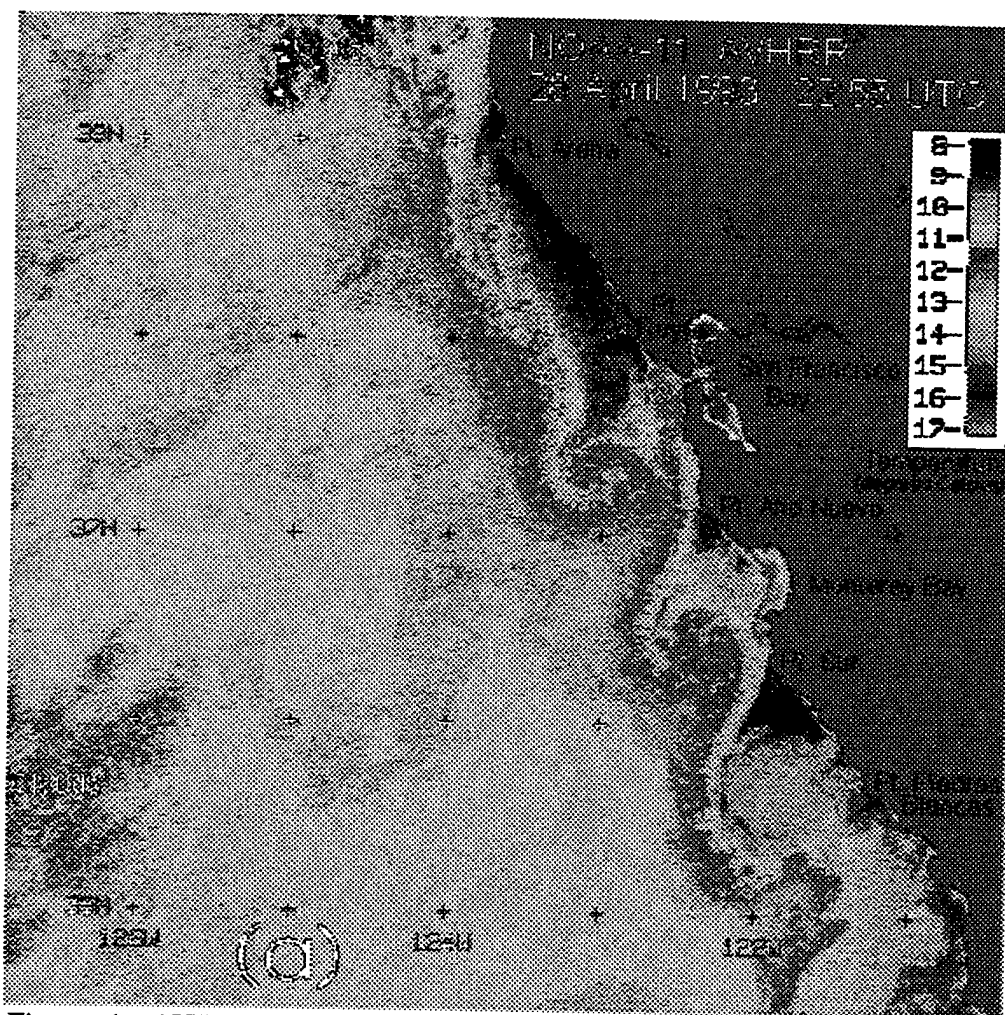

*Figure 4. AVHRR infra-red satellite image of sea surface temperature 28 April 1993. This image is not typical of temperature distributions in the California Current.*

The surface and intermediate depth water masses in the MBNMS are a mixture of Pacific Subarctic water having low salinity and cool temperatures and the warmer, saltier Pacific Equatorial water. Nearshore surface temperatures vary from 8°C during winter and early spring to 17°C during fall. Nearshore surface salinities vary from 34.0 psu (practical salinity units) when upwelling is strong to 33.2 psu otherwise. Streams and



rivers have large local effects on salinity, but even during flood conditions the salinity of Monterey Bay surface waters does not fall below 31 psu (Figure 5).

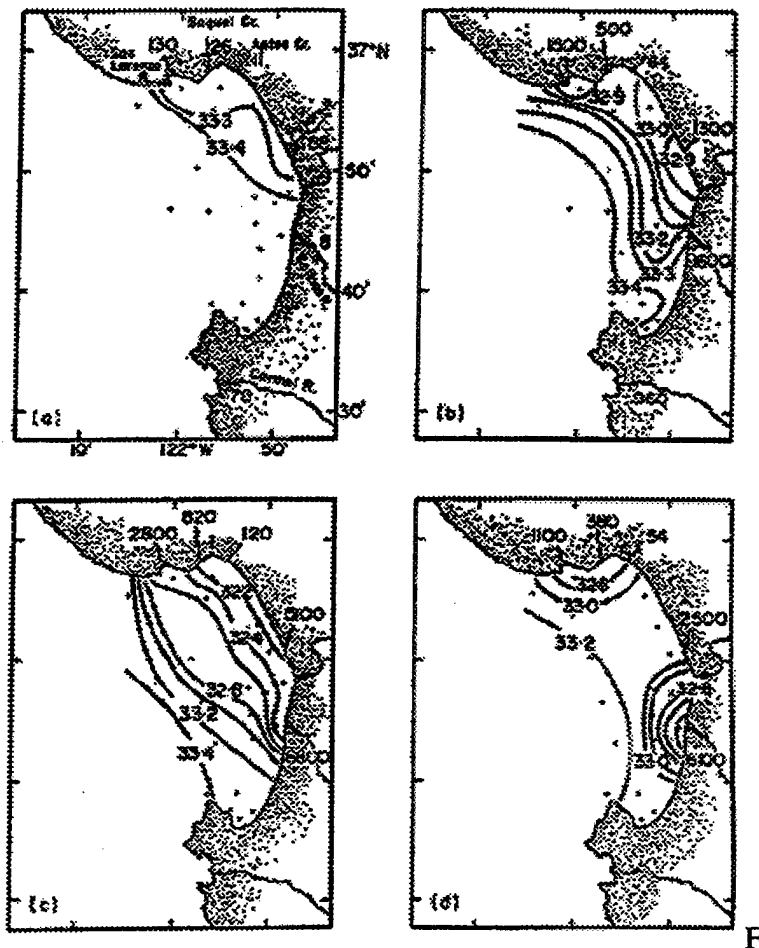


Figure 5. Near-surface salinity distributions a) 14-15 Dec. 1972; b) 25-26 Jan 1973; c) 22-23 Feb 1973; d) 22-23 Mar 1973. (Broenkow and Smethie 1978).

An analysis of surface waters in the California Current 150 km offshore of Monterey Bay, showed from harmonic analysis that the seasonal variation of temperature and salinity were 12.2°C to 15.5°C and 33.1 to 33.3 psu. Both temperature and salinity maxima are reached typically in September-October, while minimum temperature occurred in February-March and minimum salinity in December-January. At a station 10 km south of Monterey Bay off Point Sur, temperature varied from 11.1°C in May to

13.8°C in November and salinity from 33.4 in January to 33.6 in July-August. Variance about the regression lines was about 1°C and 0.2 psu.

The vertical distributions of salinity, temperature, dissolved oxygen and inorganic nutrients were systematically characterized by the California Cooperative Fisheries Investigations. Monthly or biweekly hydrographic stations were occupied at Hopkins Marine Station CalCOFI Station H3 about halfway between Point Pinos and Point Santa Cruz where the canyon depth is about 900 m. The near-surface halocline is accompanied by a similar thermocline. It is noted that in spring and summer, the mixed layer is often absent. Conditions similar to those offshore are found at the H3 entrance to Monterey Bay so that mid-Bay waters are only slightly altered by localized warming and nutrient assimilation. The oxygen minimum, which is prevalent throughout the North Pacific, is found near 600 m where oxygen concentrations are less than 0.5 ml/liter or 20 mmol/kg and saturation levels are less than 10%.

Within the coastal regime, sea surface flow undergoes a seasonal reversal. During the late fall and winter the direction is primarily poleward while equatorward flow dominates during the spring and summer. The equatorward flow is coupled with the intensification of northwesterly winds that generally parallel the central California coastline. Wind intensity is proportional to the barometric pressure difference between the North Pacific High and the thermal low pressure centered in southern Nevada and California. This pressure gradient begins to form and strengthen in the spring. The sudden strengthening of the northwesterly winds, usually in March- May, may result in the "spring transition" in which upwelling commences and local sea surface temperatures fall by as much as 5°C within a few days. Surface waters are advected offshore, and

equatorward geostrophic flow is established after baroclinic adjustment. During late fall, the North Pacific High weakens and migrates southward and the thermal low disappears. The surface flow reverses to poleward and can be regarded as the surface signature of the California Undercurrent, although some investigators refer to this poleward current as the Davidson Current. The timing and phasing of these coupled oceanographic and meteorological processes has been extensively studied along the California coast north of Pt Reyes.

Locally the alongshore wind stress is persistently from the north and does not reverse direction, while along the Mendocino coast and further north, the direction of the wind stress changes seasonally. During late fall and winter, winds become more variable as storms periodically reverse the wind direction. Maximum seasonal wind stress at 35°N occurs in May-June where at 39°N the maximum wind stress occurs in July. This seasonal variation in wind patterns has several effects. When winds are strongly from the northwest (between March and September along the central California coast, , the wind-driven Ekman transport of the waters between the surface and about 50 m has an offshore component. The sea surface is lowest along the coast, and tilts upward by about 20 cm across the width of the California Current (1000 km). Surface waters moved seaward are replaced by deeper upwelled waters, which flow shoreward and upward beneath the Ekman layer. The isopleths of density, temperature, salinity and other tracers tilt upward by approximately 50 m in 100 km and locally by as much as 100 m in 20 km. Upwelling is the combined process of the vertical movement of the pycnocline and inclined flow along it. Upwelling speeds may reach 1 m/day or greater under favorable wind conditions


and from depths as great as 200 m. The seasonal rise and fall of temperature isopleths is observed to 500 m.

The Bakun (1973) upwelling index provides an estimate of the offshore Ekman transport and is computed from large-scale barometric pressure distributions. The upwelling indices may yield different strength and phasing of upwelling than that inferred from winds measured from coastal buoys or shore stations, and neither is a perfect predictor of local upwelling strength, which also depends on the local wind stress curl. Two areas of coastal upwelling are present in the MBNMS: one near Point Año Nuevo, and a stronger upwelling locus south of Point Sur. These upwelling areas are readily observed in AVHRR satellite images as cool areas. Surface temperature differences between the upwelling areas and 100 km offshore are typically 3 to 5°C.

### III. MIBEX at the Monterey Bay

#### A. Preparation

The original concept for the experiment was to validate the IMPACT25 by pushing a 55-gallon drum off the end of Fisherman's Wharf Pier Number two (Figure 6). This would accomplish two major tasks. First, it would check to see how the physics of the model worked with a real world situation. Second, it would provide directly measured sediment data possible to input into the model since gravity cores would be taken simultaneously with the drops. This second task would be critical because the underwater environment is incredibly dynamic and the code calls for input of sediment characteristics.

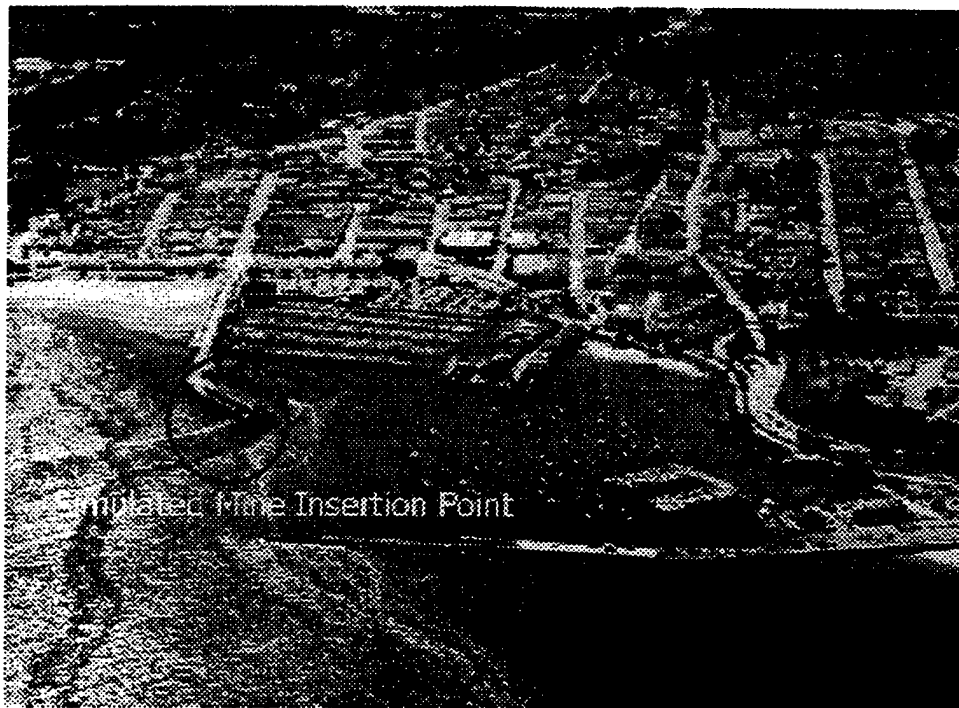

*Figure 6. The initial experiment site.*


This location was forsaken after a bottom survey was conducted on a dive and the bottom was found to be composed mostly of hard shale, fossilized shells and old washing

machines and therefore was judged unsuitable for any type of mine penetration. Its depth and accessibility to crane operations would have made it a good location for multiple drops.

On February 7, 2000, a Sedimentologist from the Monterey Bay Aquarium Research Institute (MBARI) named Charlie Paull was contacted to inquire on recommendations for an alternate site in Monterey Bay. He confirmed that Monterey Harbor would be a poor choice due to the hardness of the bottom and suggested going to an area approximately one quarter mile offshore from Fort Ord's now defunct Officer's Club. After numerous reviews, this site was also abandoned due to logistics complications pertaining to oceanographic data measuring equipment desired in the experiment.

On April 17, 2000, a discussion was held with Rob Wynand of the Naval Postgraduate School and it was decided that a survey would be conducted at the site of the Monterey Inner Shelf Observatory (MISO) off of Del Monte Beach in Monterey Bay. After an exploratory dive, the bottom composition was determined to be adequate for the experiment. The bottom was found to be composed of "sandy ledges" and the water depth was approximately 12 meters (similar to real world bottom mining environments).


Following this meeting, Captain Lee Bradford of MBARI was contacted for information on research vessels at our disposal. The platform we used had to be capable of safely releasing and retrieving a 650 pound barrel multiple times from the bottom in 12 meters of water. The Research Vessel John Martin (Figure 7) was selected and 23 May was scheduled to conduct the experiment.

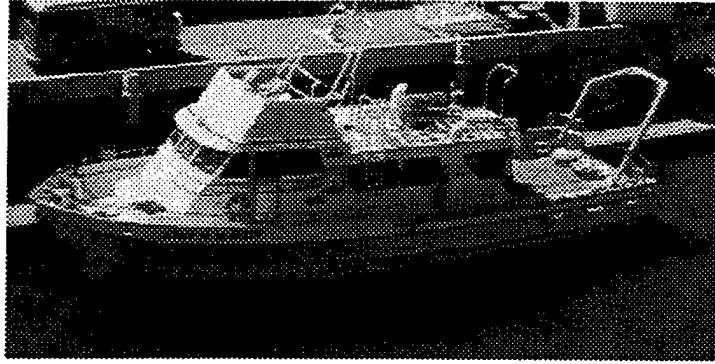

*Figure 7. R/V John Martin, MBARI*

In conjunction with Captain Bradford's meeting, Jon Heine was contacted and solicited to be the dive supervisor for the experiment. It was ascertained that a minimum of four divers would be needed to safely go up and down the 12-meter depth 20 times. Heine's divers would also take the gravity cores and film the barrel entry and other pertinent underwater evolutions.

The next task was contacting the United States Geological Survey (USGS) office to determine the proper procedure for taking and analyzing gravity cores. A geologist named Homa Lee volunteered to provide assistance on May 31, 2000 and offered the use of the USGS freezer to store the gravity cores after the experiment. On the morning of May 22, 2000, Andy Andersen of the Oceanography department at the Naval Postgraduate School (NPS), contacted the Environmental Health office and secured a 55 gallon drum which was to be modeled as the "mine." Although "ribbed," it was assumed the symmetrical design would have little effect on hydrodynamics in the water column. (Figure 8)

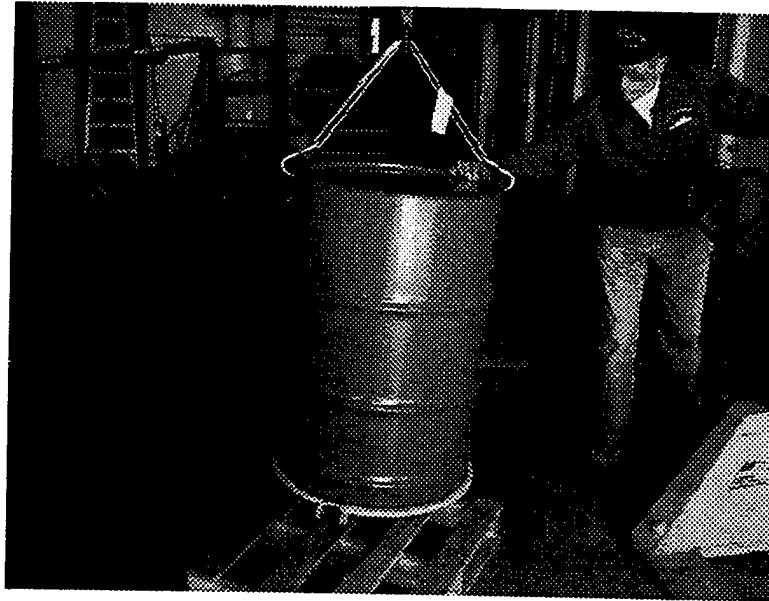


*Figure 8. Andy Andersen getting the "mine" ready. (May 22, 2000)*

The mine was to be filled with sand to give it a uniform density. This sand was obtained from the beach adjacent to the NPS Oceanography Laboratory near Del Monte Beach in Monterey Bay.

Prior to this happening, gravity cores had to be fashioned. 2 ½ inch polycarbonate piping and rubber stoppers were ordered. The polycarbonate piping was cut into eight, three-foot lengths and four, two-foot lengths. These were carried in a special rack designed to transport the sediment intact to the USGS. (Figure 9)

On the afternoon of May 22, 2000, the R/V John Martin was loaded with the mine, gravity cores and dive equipment. Captain Lee Bradford supplied a seaforth quick-release to be used when dropping the barrel. This quick release could be easily fastened and released by a diver in the water, therefore providing the greatest margin of safety for the divers.



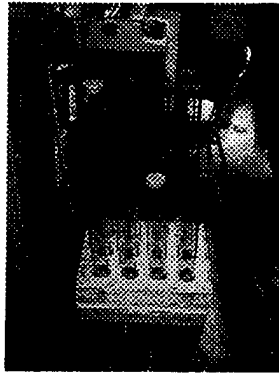

*Figure 9. Gravity Cores in Rack*

### **B. Experiment**

On May 23, 2000, the R/V John Martin got underway at 0630. The team was on location and in the water by 0805. After an extensive safety discussion, it was decided that the barrel/mine would be released while touching the surface. This would be to eliminate any chance of inertial effects caused by uneven introduction into the air-sea interface. This also set the initial velocity parameter in the code to zero.

The barrel was to be released 20 times, although, only seventeen drops were actually made because of diver limitations. The diver would snap the quick-release shackle on the barrel and then dive down to conduct measurements. The average depth of the water was 13 meters. Since it was uncertain the path the barrel would follow, both the releasing diver and a second safety diver would stay on the surface until after the barrel had dropped. Once reaching the bottom, one diver would take penetration measurements using a meter stick marked at millimeter increments while the other would take a gravity core.

After 17 drops, the divers began to run out of air and results were not varying greatly so the decision was made to end the experiment. Upon return to the Monterey Bay Aquarium Research Institute, the gravity cores were taken immediately to the USGS

Laboratories in Menlo Park, California where they were refrigerated until the analysis could be performed on May 31 – June 1, 2000.

## IV. SEDIMENT DATA ANALYSIS

### A. Gravity Core Analysis

Analysis of the gravity cores was begun on May 31, 2000 at the USGS Laboratories in Menlo Park, California with the aid of a graduate student, Priscilla Barnes. The gravity cores were sliced into two-centimeter segments to a depth of ten centimeters, and then sliced into four-centimeter segments. A Fall Cone Apparatus (Model G-200) was used to determine sediment shear strength. (Figure 10)

In the test, it is assumed that the shear strength of sediment at constant penetration of a cone is directly proportional to the weight of the cone and the relation between undrained shear strength  $s$  and the penetration  $h$  of a cone of weight  $Q$  is given by:


$$s = K \frac{Q}{h^2}$$

where  $K$  is a constant which depends mainly on the angle of the cone, but is also influenced by the sensitivity of the clay/sediment.

Four different cones are used with this instrument, each one having the following measuring range:

<i>Weight</i>	<i>Apex-Angle</i>	<i>Penetration in mm</i>	<i>Undrained shear strength in <math>\frac{t}{m^2}</math></i>
400 gr.	30°	4.0 – 15.0	25 – 1.8
100 gr.	30°	5.0 – 15.0	4 – 0.45
60 gr.	60°	5.0 – 15.0	0.6 – 0.067
10 gr.	60°	5.0 – 20.0	0.10 – 0.0063

The cones are suspended from a permanent magnet. By pressing a knob, the magnet is moved so that the magnetic field is broken momentarily, and the cone is released.

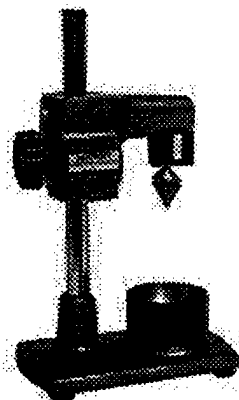

*Figure 10. Fall Cone Apparatus Model G - 200*

Measurements are taken of penetration depth and the evolution is repeated five times per sediment slice. These values are then averaged and correlated with a table which gives shear strength.

### **B. Sediment Profiles**

Previous studies (Taber 1999; Chu et al. 2000a,b) showed that the sediment parameters are the most critical element in determining how deep the mine was buried when it came to rest. Sensitivity to the alteration of sediment density and shear strength was tested using six sediment profiles including three profiles from Sydney Harbor (Mulhearn, 1993) and three profiles available for selection in the IB model. The profiles included in the model are called simply “softsed”, “medsed”, and “hardsed” and do not clearly correspond to specific sediment types.

During the MIBEX at the Monterey Bay, we obtained 17 gravity cores. Sediment density was observed to generally increase until approximately 6-9 cm below the surface after which it would decrease (Figures 11-13). Sediment shear strength tended to increase as depth increased (Figures 14-16).

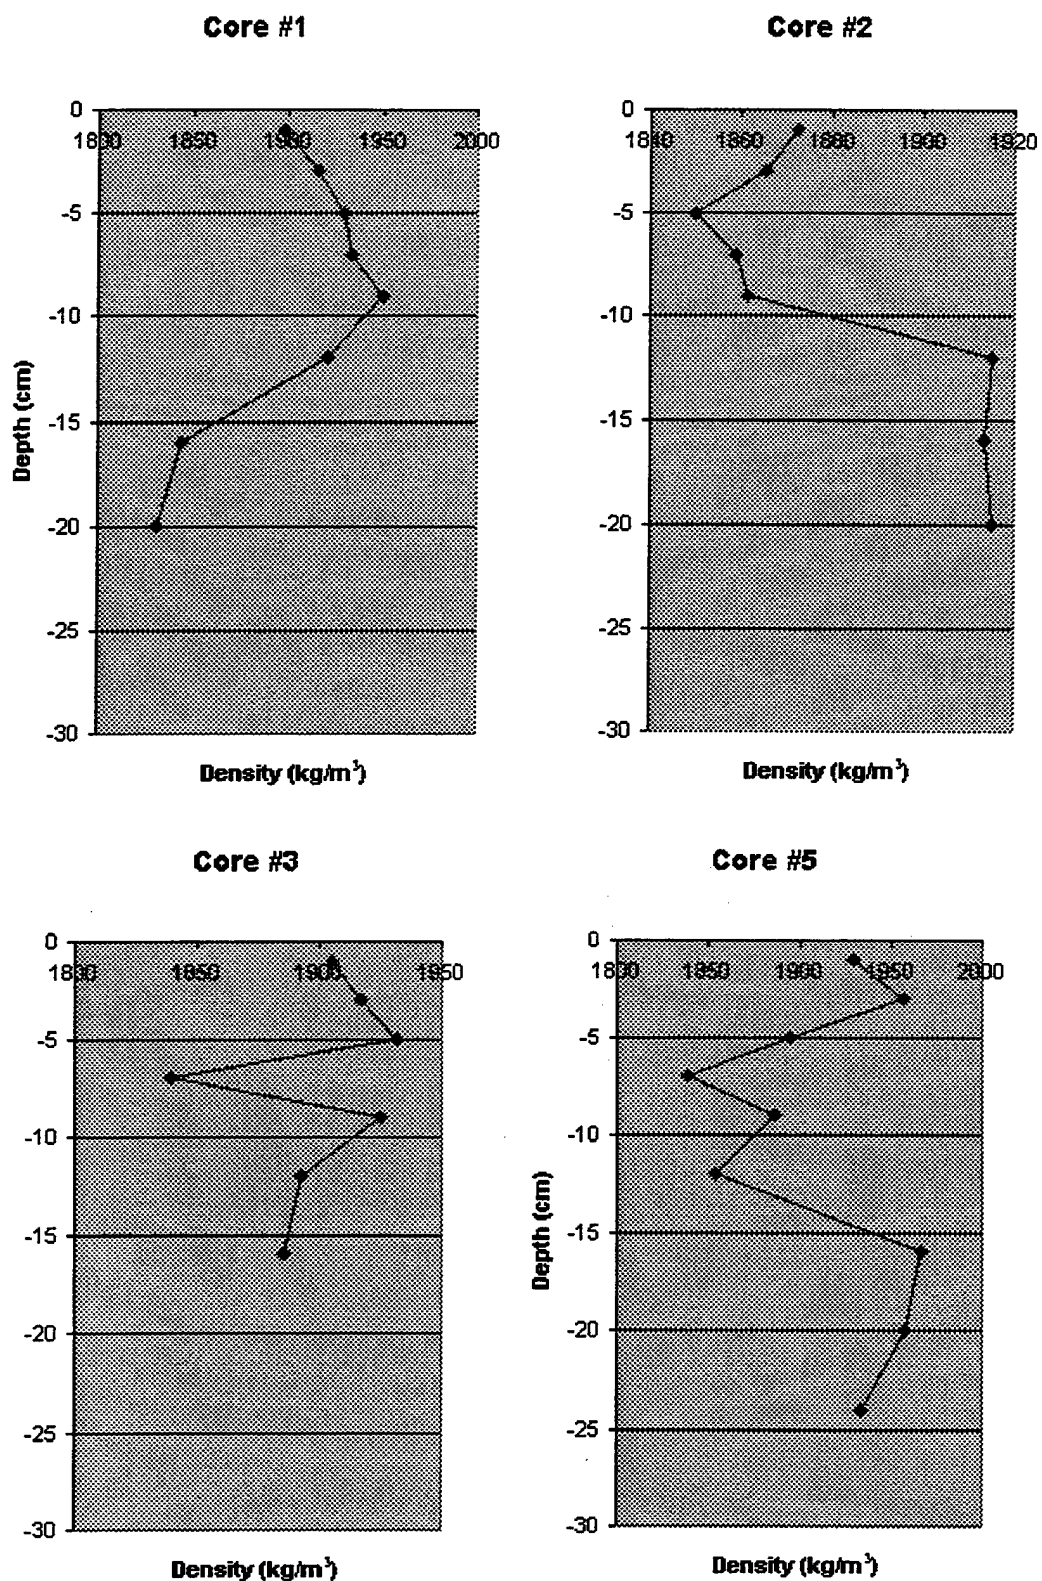


Figure 11. Density Vs. Depth For Cores 1-3, 5.






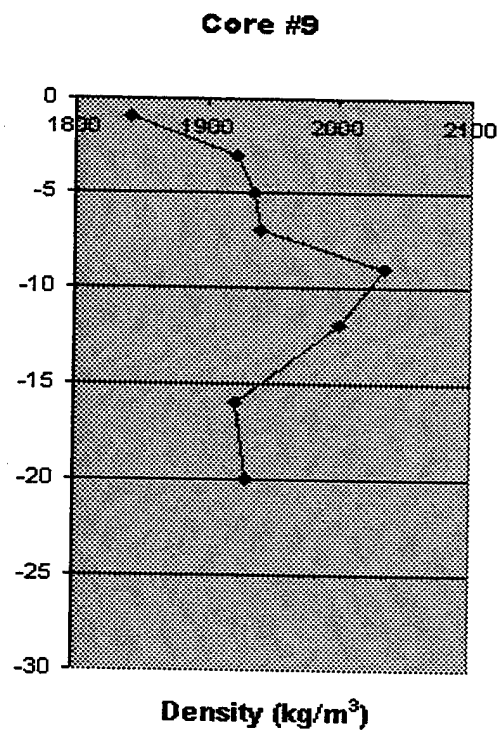


Figure 12. Density Vs. Depth for Cores 6-9.


**Core #10**

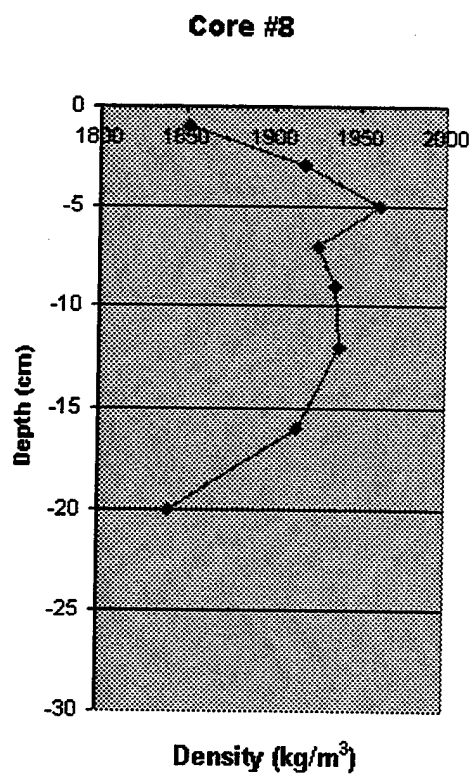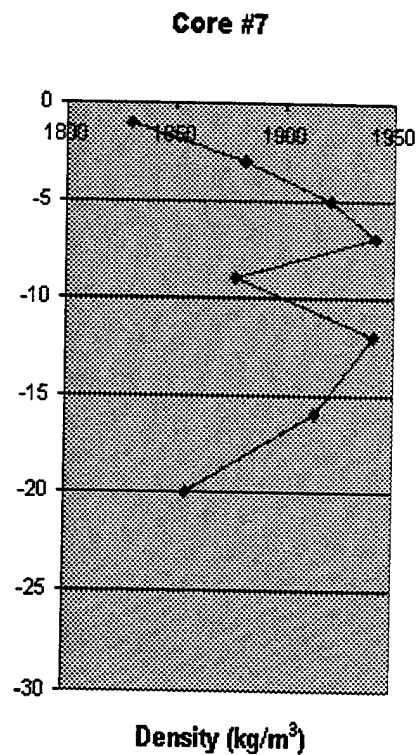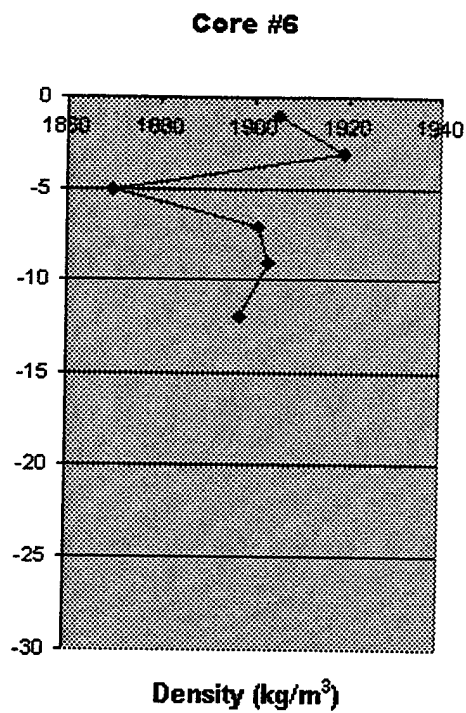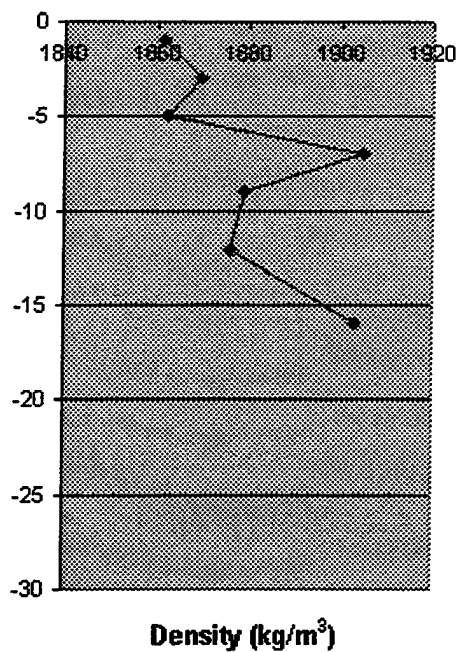

**Core #11**

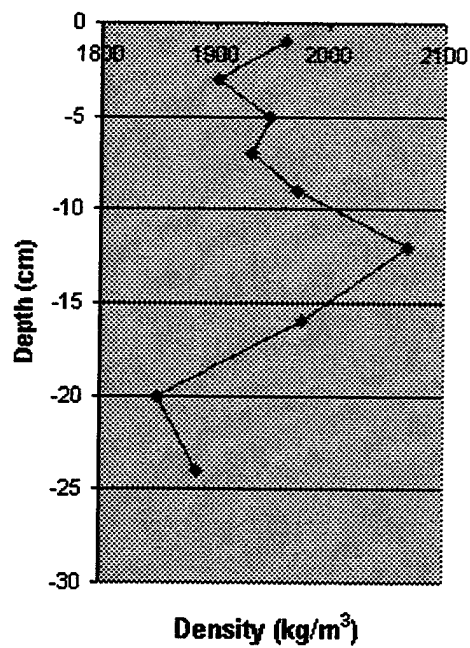

**Core #12**

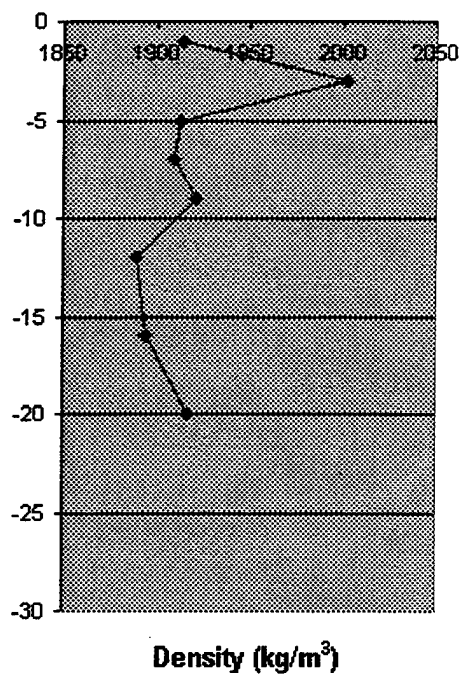

*Figure 13. Density Vs. Depth for Cores 10-12.*

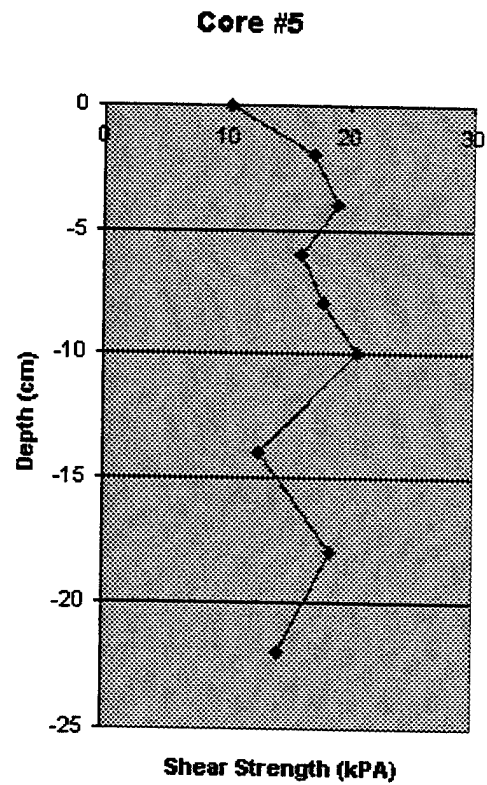
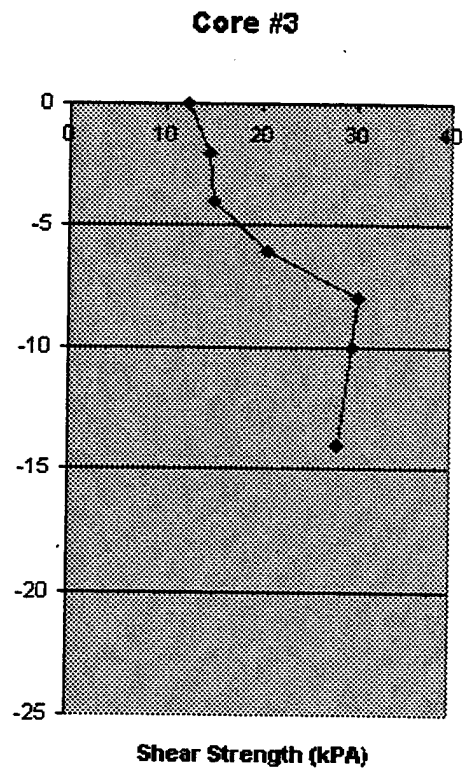
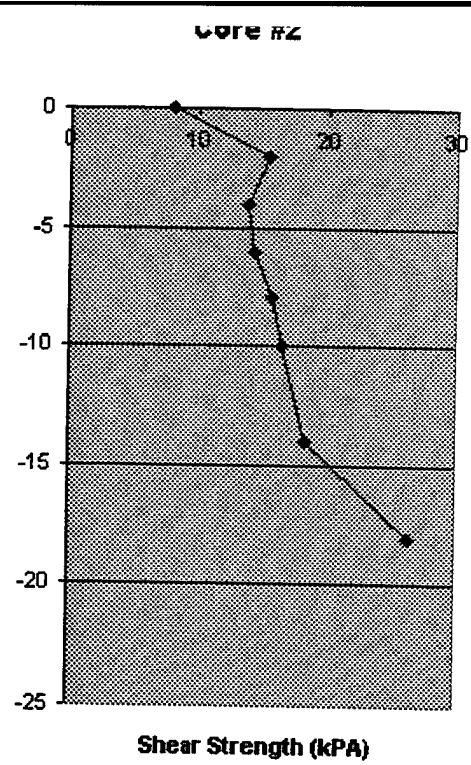
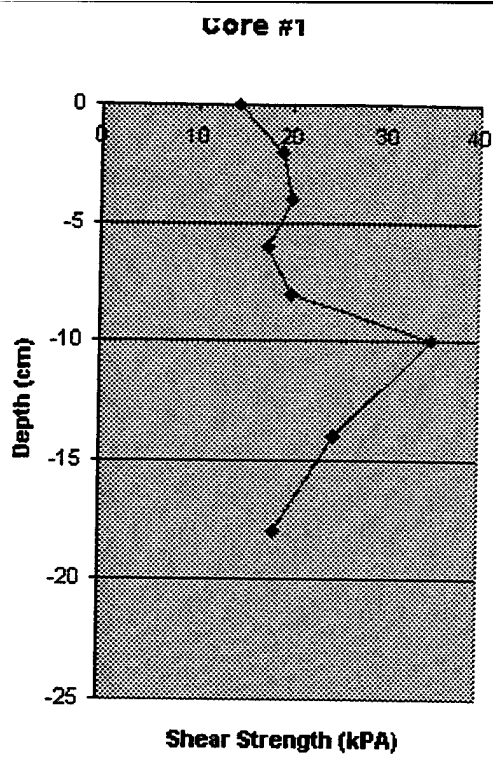


Figure 14. Shear Strength Vs. Depth for Cores 1-3, and 5.






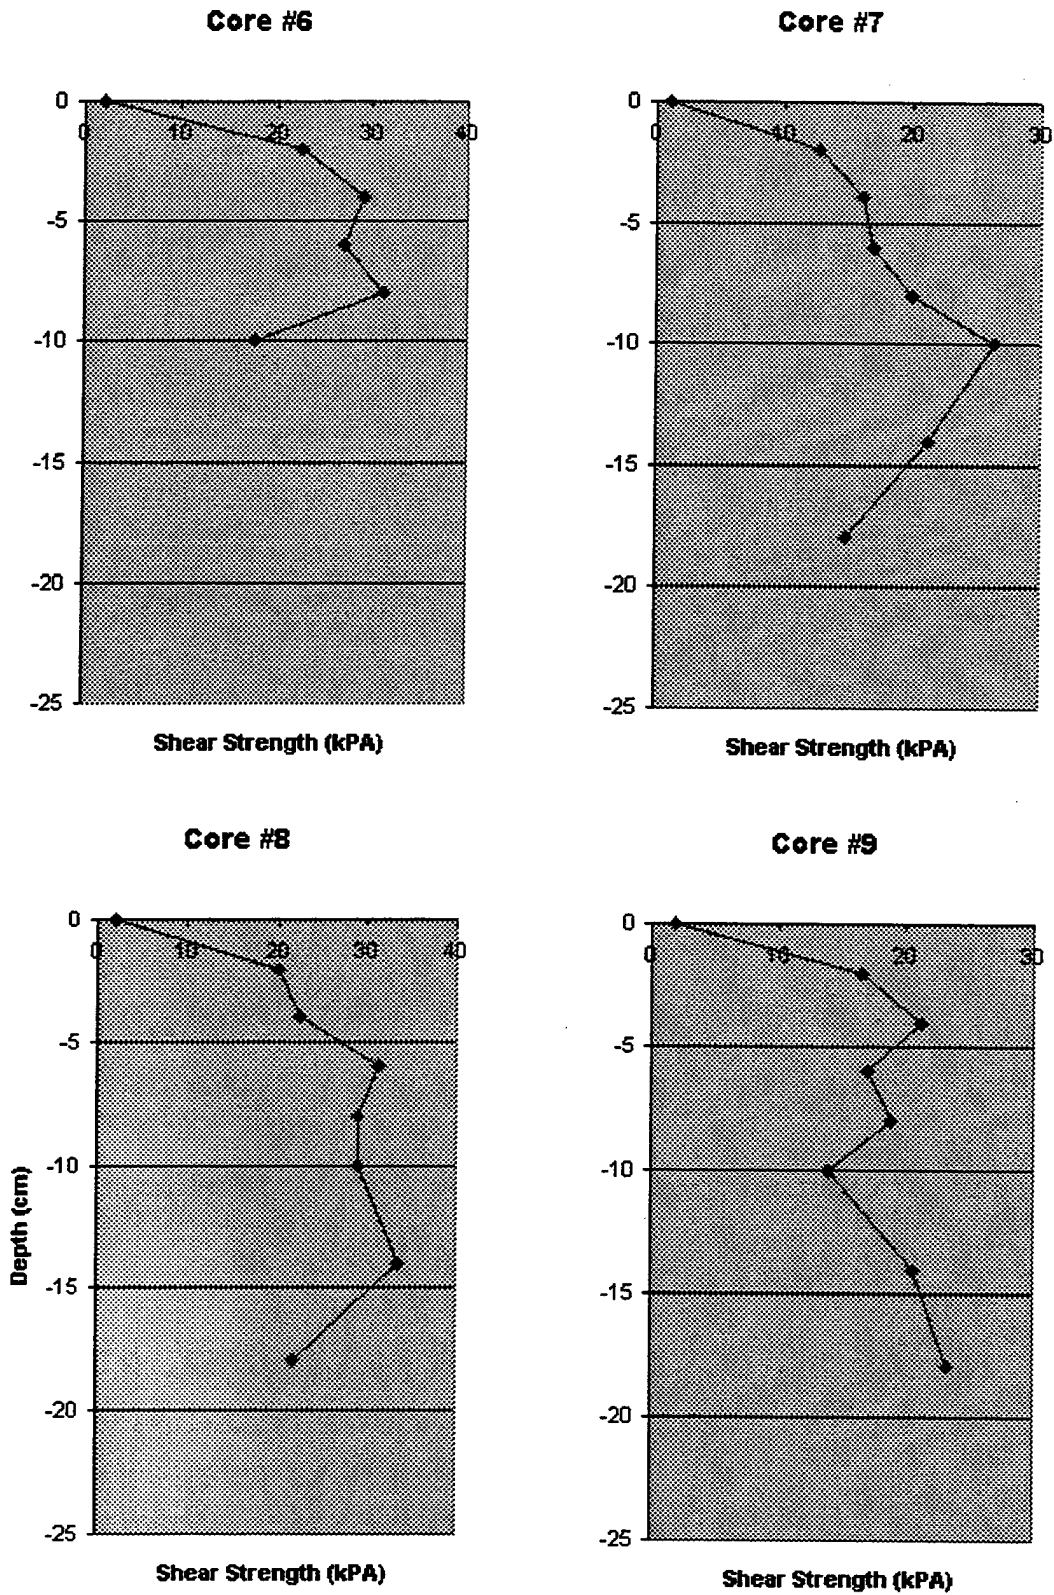


Figure 15. Shear Strength Vs. Depth for Cores 6-9.

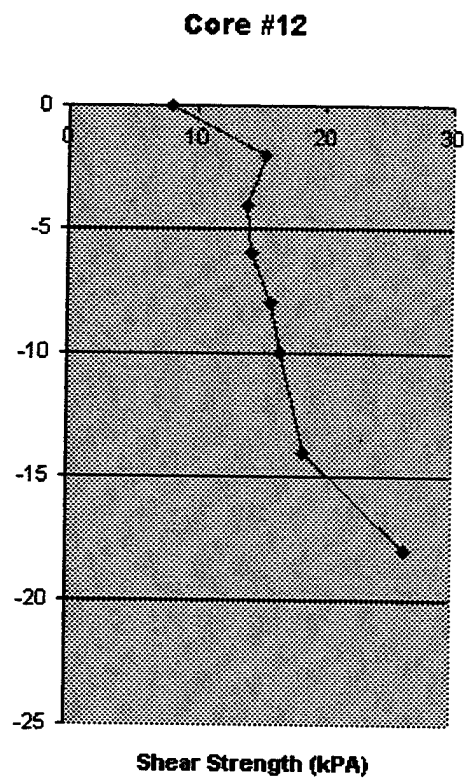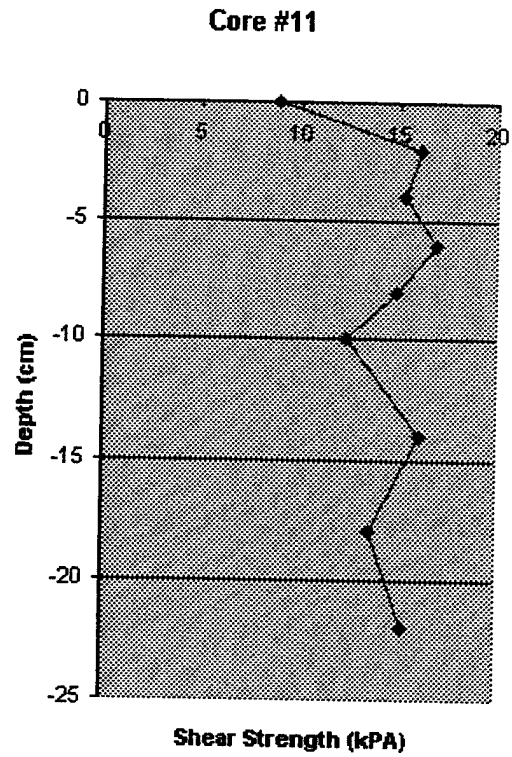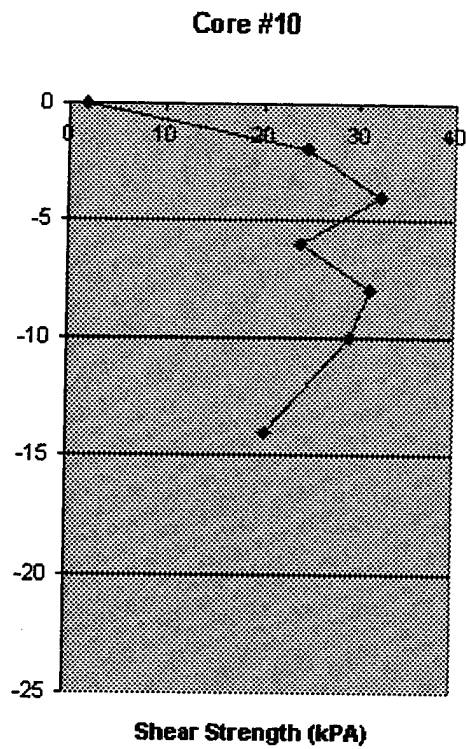


*Figure 16. Shear Strength Vs Depth for Core 10-12.*

### C. Density - Shear Strength Relation

Hayter (1986) discussed an equation originally derived by Krone (1963) for deriving shear strength,  $S_u$ , from density using empirically derived coefficients  $\alpha$  and  $\beta$ :

$$S_u = \alpha \rho^\beta$$

Values for  $\alpha$  and  $\beta$  must be calculated for each separate sediment type, after which the shear strength can simply be calculated using the coefficients. The scatter diagram between shear strength and density (Fig. 17) doesn't show such an exponential relationship. However, it does indicate that the higher the density, the higher the shear strength.

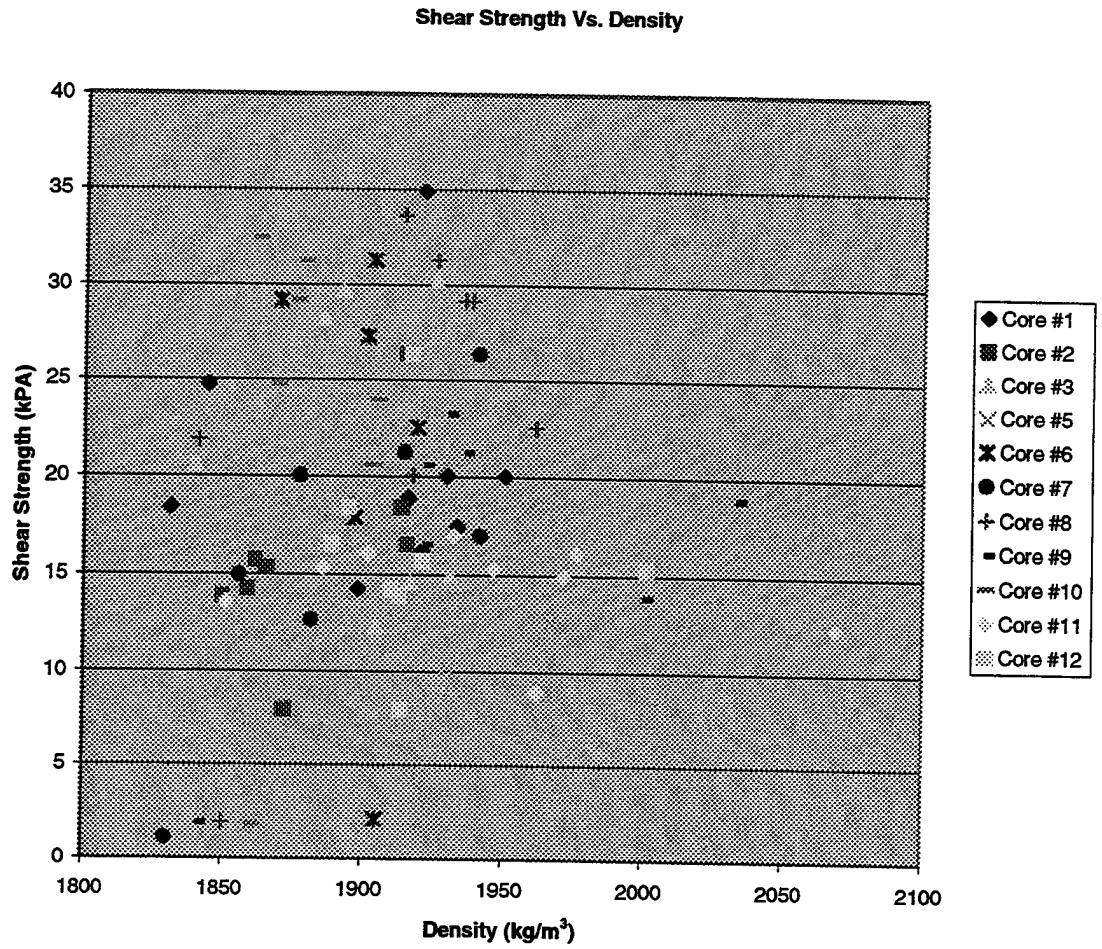

*Figure 17. Shear Strength Vs. Density analyzed on June 1, 2000.*

## **V. REAL/MISO DATA ANALYSIS**

### **A. General Information of REAL/MISO**

The Monterey Inner Shelf Observatory (MISO) is a component of the Rapid Environmental Assessment Laboratory (REAL) being developed by the oceanography and meteorology departments at the Naval Postgraduate School. The REAL laboratory encompasses a range of littoral oceanography observation and modeling programs focused on littoral (coastal) oceanography. MISO, designed and implemented by Research Associate Professor Tim Stanton, has a long term cabled instrument frame deployed at the southern end of Monterey Bay in 12m of water, about 600m from the shoreline, with support instruments on the sand dunes inshore from the underwater frame. The instruments on the 12m frame are designed to study the interaction of winds, waves and the sediment bed in the inner continental shelf, just offshore from the surf zone. Surface observations of the surf zone and breaking waves are made from an automated digital camera located on the sand dune overlooking the underwater frame. By using a high bandwidth multifiber optic and power cable connected to a shore terminus, long term measurements of these important coastal processes can be made for use in research programs and teaching by faculty of the Oceanography Department at the Naval Postgraduate School and shared with other users. Hourly summaries of the data sets are available through the main MISO web site.

An offshore directional wave buoy deployed in January 2000 by Associate Professor Tom Herbers provides hourly updated directional wave spectra and wave height / direction time series.


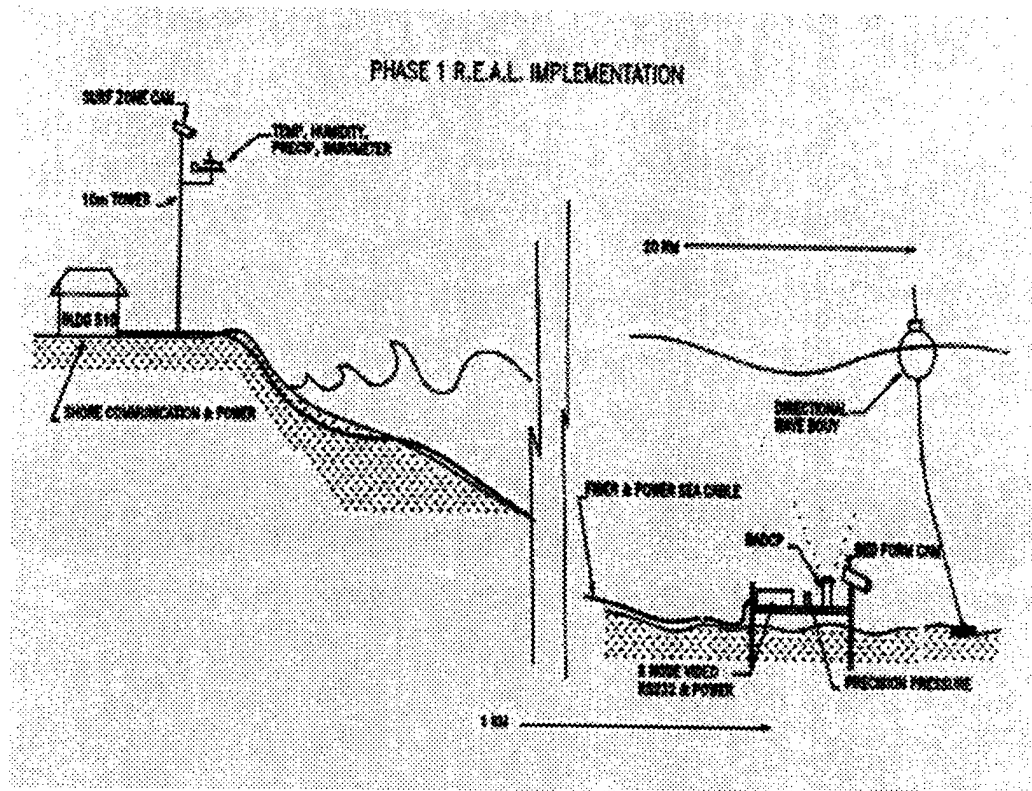


Fig. 18 Phase 1 R.E.A.L Implementation

## B. Real-Time Wave Data

Analysis of wave height data provided by the MISO experiment shows a significant wave motion of approximately 0.5 meters (Figure 19). Oscillation of wave heights significantly affects water depth and subsequently terminal velocity of the mine upon impact. This is especially significant when running the model in shallow depths.

Although not a parameter considered in the IB model, wave action has a direct effect on water depth and, therefore, on velocity of the mine as it reaches the sediment interface (Taber 1999). This effect only becomes significant when the ratio of water depth to wave height is high, and only at very low release altitudes.

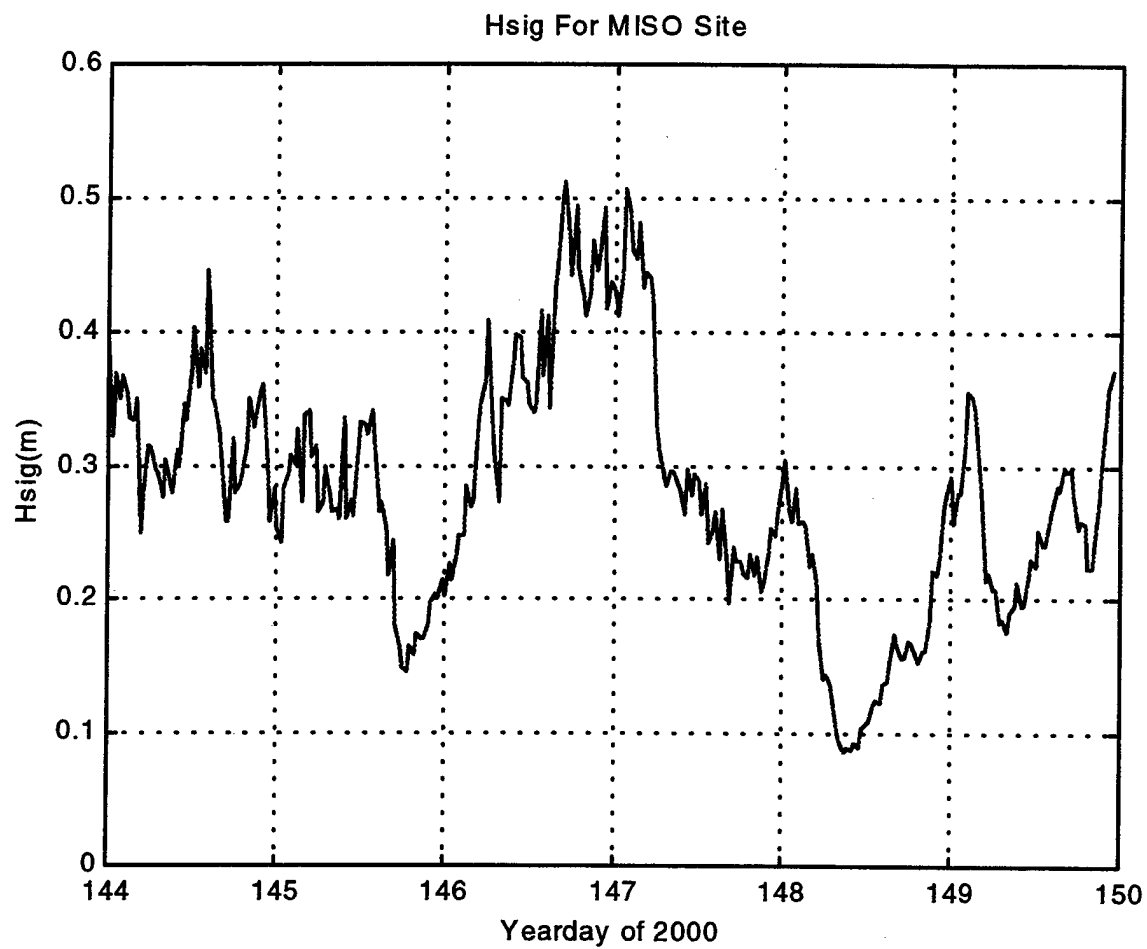

*Figure 19. Hsig Vs. Yearday during the period of the experiment.*





## VI. MINE IMPACT BURIAL

### A. Hydrodynamic Processes

IMPACT25 tries to estimate the characteristics of the water column by using fluid drag approximations in its calculations. The essential elements of the mine impact burial model translate into the science and engineering of hydrodynamic process of a falling object and of sediment transport. The current model is only based on the momentum balance of the falling mine,

$$\int \frac{dV}{dt} dm = F_{w,a} + F_b + F_d$$

where  $V$  is the velocity of the mine,  $F_{w,a}$  is the force due to the air weight of the mine,  $F_b$  is buoyancy force and  $F_d$  is drag force.

Buoyancy force is the upward force exerted upon a mine in the gravitational field by virtue of the density difference between the mine and that of the surrounding fluid. We use the Cartesian coordinate system ( $x, y, z$ ) with the  $z$ -axis in the vertical direction, and use the unit vector  $\mathbf{k}$  along the  $z$ -axis (pointing downward). The buoyancy force is then computed using the density value for air or water,  $\rho$ :

$$\mathbf{F}_b = -\rho g C \mathbf{k}$$

A cylindrical mine penetrating into water passes through two distinct regimes. The first regime is the cavity regime. As the mine pushes into the air-water interface, it creates a cavity that consists of a combination of air and water particles. The ratio of air to water in the cavity decreases until the fluid properties become that of water only, at which time the mine is in the fully wetted regime. A temporal variation of the mine's vertical position can be calculated (Taber 1999; Chu et al. 2000).

When the vertical distance of the mine traveling in the water equals the water depth, the mine velocity is called the bottom impact velocity, which is the initial condition for determining the mine burial depth in the sediment.

Penetration of the cylindrical mine into the bottom sediment depends primarily on the attitude and velocity of the mine upon impact, as well as the sediment properties of density and shear strength. Initial impact of the cylindrical mine into the sediment creates a cavity in which the fluid properties of water and sediment are interacting. The kinematic viscosity of the sediment,  $\Lambda_s$ , is not a pure constant, but rather is equal to the water viscosity,  $\Lambda_w$ , plus that resulting from the shear stress of the sediment:

$$\Lambda_s = \Lambda_w + S_u / (\Delta_s dV/dz)$$

where  $\Delta_s$  is the density of the sediment and  $S_u$  is the shear strength.

### **B. Mine Burial Dynamics**

The vertical momentum balance of a mine in the sediment phase is given by:

$$M_r dV/dt = F_{w,a} + F_b + F_d + F_c + F_s$$

where  $F_b$  is the buoyancy force in the sediment,  $F_c$  is the compressive force, and  $F_s$  is the shear force.  $F_c$  and  $F_s$  are additional forces (different from air and water phases) exerted on the mine by the sediment. They are proportional to shear strength of the sediment and the projected area of the mine. If the mine is a right circular cylinder, the compressive force is twice the shear force:

$$\begin{aligned} F_c &= 2 F_s \\ F_s &= S_u A \end{aligned} \tag{21}$$

The mine burial depth is predicted by integrating (20) with respect to time until the mine velocity becomes zero. Accurate values for sediment properties are essential to

the accuracy of this process. Shear strength and density have a strong impact on the computation of all forces as well as buoyancy weight and added mass.



## VII. MODEL DATA COMPARISON

### A. Model Description


Arnone and Bowen developed the impact burial model in 1980. In its original form, it modeled the two-dimensional free-fall history of a right cylinder falling through three phases (air, water, sediment) and predicting the final depth of burial in the sediment. While the concept was accurate, there were a number of problems with the initial model such as a failure to accurately predict terminal velocity in the water column, burial depth in very soft and hard sediments, and unrealistic predictions under some environmental conditions. Recognizing these problems, Satkowiak made a number of modifications to the basic model. These included:

- Correcting the reference flow area used in the drag calculations
- Correcting the calculation of added mass term
- Including a term to calculate the drag due to the front nose of the cylinder
- Allowing for non-blunt noses of mines
- Including an option to input water temperature
- Including the retarding forces in the sediment due to its semi-solid nature
- Redefining the method of determining the viscosity and density of the water/sediment mixture during the sediment/cavity regime.

While substantially improving the predictive capability of the model, further improvements were implemented by Hurst. These changes provided new methods for deriving the forces acting on the mine as it passes through the air-water interface and sediment.

## B. Model Data Comparison

After running the model for each gravity core regime and location, results were averaged and compared with measured data. A chart of the results is found in Figure x.

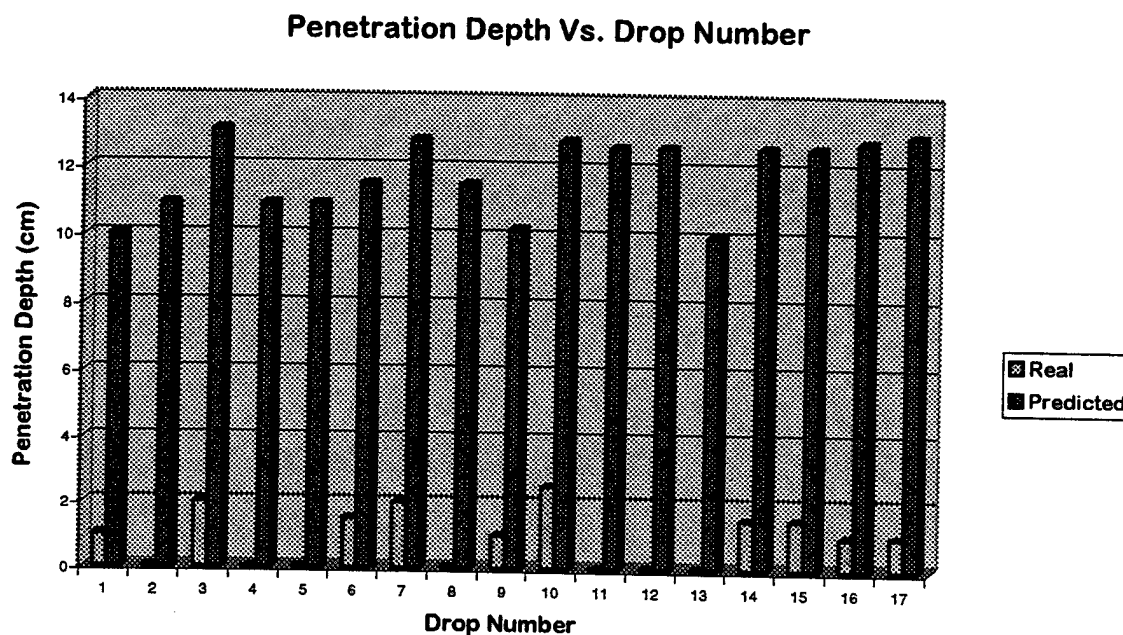

*Figure 20. Measured versus Impact Burial Model output for May 23, 2000.*

As evident, the model over predicts actual burial depth by an order of magnitude on average. (See model output Appendix II) Since the gravity cores were taken approximately two to three meters from the impact location, several were taken for each drop. This allowed an average to be calculated in order to yield more accurate results. The model is extremely user-friendly and allows the ability to input the mine dimensions as long as it is a standard cylinder or tapered mine. User input parameters for the environment are in Table 2.

---

**Input Parameters**

---

Mass of the mine in air	Mass of the mine in water
Mine length	Mine diameter
Mine maximum diameter	Center of mass of the mine
Altitude when released	Angle when released
Initial rotation rate	Water depth
Water temperature	Sediment Density
Sediment shear strength	

---

*Table 2. IMPACT 25 Model Input Parameters*





## VIII. CONCLUSIONS

During the Monterey Bay Mine Impact Burial Experiment, the simulated mines were dropped seventeen times. After each drop, the professional divers measured the water temperature, the mine burial depth and took the gravity cores. Core transportation occurred immediately upon return to the United States Geological Society (USGS). Sediment density and sediment shear strength were analyzed from these cores. This experiment provided a synchronous data set on simulated mine burial and ocean environment. This data set to verify the IMPACT25 model and found that the model consistently over-predicted the mine impact burial at least an order of magnitude.

Parameters inputted into the IMPACT25 model can be broken up into three categories: (1) Oceanographic, which includes water temperature and depth. (2) Physical, which includes release medium, initial velocity, and orientation. (3) Sediment, which includes sediment density and shear strength at varying levels.

It is not believed that there is a problem in how the model interprets the sediment data. Actually, the model is very robust in its ability to allow the user to input multiple sediment layers with varying shear strengths at an impact area. In addition, although not realistic in a real world environment, sediment data was obtained simultaneously to the drops. A major characteristic of ocean sedimentation is that the layers closest to the surface change frequently due to the dynamic conditions at the water-sediment interface. Should the code ever be run using dated sediment data, results could be immediately held in question due to the significant change that occurs in sediment in relatively short periods of time.

The physical parameters are the most stable factors in the model. Gravitational acceleration is a constant and velocity can be readily ascertained through calculations or direct measurement. There is a forewarned problem with input of how much inertial spin the mine has when it impacts the air-sea interface. This is not an issue as long as the mine is dropped at a fixed orientation, which was the case during the experiment. The code will certainly not correctly calculate the amount of spin or change in orientation experienced by a mine of varying geometry as it strikes the air-sea interface should it be dropped by an airborne platform.

It is the model's lack of sensitivity to hydrodynamic effects in the water column that provides the greatest error. Any water column in an exposed to the open ocean such as Monterey Bay will be subject to variances in wave height caused by tidal and pressure effects. In addition, there will be variances in the momentum flux felt by the column due to current variations in the x, y, and z planes. These effects can cause turbulence in the column that will impede the smooth transition of the mine as it travels from the surface to the bottom. Digital video taken during the experiment illustrated the oscillations of the barrel as it traveled through the water column. These oscillations caused by turbulence act as a frictional force in the water and slow the barrels velocity. Although water density is taken into account by the code, in assuming the water column is a uniformly dense and still medium, overestimation of vertical velocity is predicted. This overestimated downward vertical velocity can affect the codes calculation of impact force and hence, penetration depth.

The essential elements of the mine impact burial model translate into the science and engineering of hydrodynamic process of a falling object and of sediment transport. Any

solid object falling through fluid (air and water) should obey two physical principles: (a) momentum balance,

$$\int \frac{d\mathbf{V}}{dt} dm = \mathbf{F}_{w,a} + \mathbf{F}_b + \mathbf{F}_d$$

and (b) moment balance,

$$\int \left[ \mathbf{r} \times \left( \frac{d\mathbf{V}}{dt} \right) \right] dm = \mathbf{M}_{w,a} + \mathbf{M}_b + \mathbf{M}_d$$

where  $\mathbf{V}$  is the velocity of the mine, and  $(\mathbf{F}_{w,a}, \mathbf{F}_b, \mathbf{F}_d)$  are external forces and  $(\mathbf{M}_{w,a}, \mathbf{M}_b, \mathbf{M}_d)$  are external moments. The current IMPACT25 model only considers the momentum balance of the mine and disregards the moment balance of the mine. Such an incomplete hydrodynamics in the model leads to unrealistic prediction of the mine falling in the water (no helicoidal motion). If considering momentum and moment balance, the falling object should have a helicoidal motion. Without the helicoidal motion, the IMPACT25 may over-predict the impact burial depth.

Possibilities for error exist in the implementation of the experiment. It was assumed that the barrel was of uniform density because it was filled completely with sand from the beach. This sand was partially wet and contained small amounts of debris which could minutely affect the uniformity of the mine's density and therefore affect oscillation rate. The divers taking the measurements were using meter sticks and the degree of precision could be called into question. However, errors would most likely not be on a full order of magnitude. Most measurements were made on the order of a few centimeters and the code predicted most penetration depths in excess of 10 centimeters.

In conclusion, use of the IMPACT25 prediction model should be approached with caution. Lack of sensitivity to the hydrodynamic effects in the water column cause the code to predict higher downward vertical velocities and therefore a greater impact force

than reality. Since the sensitivity of a mine can be directly attributed to the amount exposed, this error can have dire consequences for the operator in the field.

# Intact Shear Strength

$$Cur = 9.81 \times K \times W_{cone} / P^2$$

Core number M100mb

Site location Monterey Bay

Date Thursday, June 1st

Technicians Tim, Priscilla

Cone	K
10 and 60 g	0.30
100 and 400 g	1.00

Depth (cm)	W-cone (g)	P1	P2	P3	P4	P5	P-average	Cur (kPa)
0	100	8	9	11	8.5	5	8.30	14.24
2	100	6	6.5	8	7.5	8	7.20	18.92
4.5	100	7	7	8	8	5	7.00	20.02
6.5	100	7.5	8	7	6	9	7.50	17.44
8.5	100	8	7.5	6.5	7	6	7.00	20.02
10.5	100	5	6	3.5	5	7	5.30	34.92
14.5	100	6	7.5	6.5	5.5	6	6.30	24.72
18.5	100	8	7	6.5	7	8	7.30	18.41
0	100	14	11	11.5	10.5	8.5	11.10	7.96
2	100	7	7.5	9	9.5	7	8.00	15.33
4	100	7	8	10	8	9	8.40	13.90
6	100	9.5	7.5	9	8.5	7	8.30	14.24
8	100	8	8	7.5	9	7	7.90	15.72
10	100	8	6	7	9	8.5	7.70	16.55
14	100	5	9	8.5	6	8	7.30	18.41
18	100	5	6	5.5	8	6	6.10	26.36
0	100	10.5	10	8	8	8	8.90	12.38
2	100	8	8	9	8	8	8.20	14.59
4	100	9	7	8	7	9.5	8.10	14.95
6	100	7	8	5.5	7	7	6.90	20.60
8	400	11.5	12	10.5	10	13	11.40	30.19
10	400	11	12	11.5	11	12	11.50	29.67
14	400	13	10.5	12	11.5	12	11.80	28.18
0	100	12	10	9	8.5	9.5	9.80	10.21
2	100	9	7	6	7.5	8.5	7.60	16.98
4	100	8	6	7	9	6	7.20	18.92
6	100	8	7.5	8	8	7.5	7.80	16.12
8	100	8	8	6.5	7	7.5	7.40	17.91
10	100	8	8	7	5	6.5	6.90	20.60
14	100	11	9	7	10	7	8.80	12.67
18	100	7.5	7	7.5	8	6.5	7.30	18.41
22	100	9	8	7.5	10	7	8.30	14.24
0	60	10	10	8	8	10	9.20	2.09
2	100	6	6.5	6.5	7	7	6.60	22.52
4	100	6	5	5	7	6	5.80	29.16
6	100	7.5	6	5	5	6.5	6.00	27.25
8	100	6	5	6	5	6	5.60	31.28
10	100	6	8	8	10	5	7.40	17.91
0	60	11	12	14	13.5	13.5	12.80	1.08
2	100	7	8	10	10	9	8.80	12.67
4	100	8	8	7	8	8	7.80	16.12
6	100	9	8.5	6	8	6.5	7.60	16.98
8	100	7	6	8	7.5	6.5	7.00	20.02
10	100	7	6	6.5	5.5	5.5	6.10	26.36
14	100	7.5	5.5	6	8	7	6.80	21.22
18	100	9	8.5	7.5	8	7.5	8.10	14.95
0	60	8	9	10	12	9	9.60	1.92
2	100	8	7.5	6	6.5	7	7.00	20.02
4	100	6.5	6.5	6	8	6	6.60	22.52
6	100	5	5	6	7	5	5.60	31.28
8	100	7	5	5	7	5	5.80	29.16
10	100	6	6	5	5	7	5.80	29.16
14	100	5	6	5	5	6	5.40	33.64
18	100	5	7	6	8	7.5	6.70	21.85

# Intact Shear Strength

$$Cur = 9.81 \times K \times W_{cone} / P^2$$

Core number M100mb

Site location Monterey Bay

Date Thursday, June 1st

Technicians Tim, Priscilla

Cone	K
10 and 60 g	0.30
100 and 400 g	1.00

Depth (cm)	W. cone (g)	P1	P2	P3	P4	P5	P average	Cur (kPa)
0	60	9	9.5	10.5	10	9.5	9.70	1.88
2	100	7	8	8	7.5	8	7.70	16.55
4	100	7	7	7.5	7.5	5	6.80	21.22
6	100	8	8.5	6	8.5	7	7.60	16.98
8	100	7	9	6	6	8	7.20	18.92
10	100	8.5	9	10	7	7.5	8.40	13.90
14	100	6.5	6.5	7	9	5.5	6.90	20.60
18	100	8	5	6	7.5	6	6.50	23.22
0	60	10.5	8.5	9.5	9.5	11.5	9.90	1.80
2	100	6	7	6	6	6.5	6.30	24.72
4	100	5.5	5	5	5	7	5.50	32.43
6	100	6.5	5.5	6.5	8	5.5	6.40	23.95
8	100	7	5	5	6	5	5.60	31.28
10	100	6	5	6	6	6	5.80	29.16
16	100	8	6	6.5	8	6	6.90	20.60
0	100	14	11	12	9	6.5	10.50	8.90
2	100	6.5	8	8.5	9.5	6.5	7.80	16.12
4	100	8.5	9.5	7	8	7	8.00	15.33
6	100	9.5	6.5	5	8	9	7.60	16.98
8	100	9	9.5	6.5	7.5	8	8.10	14.95
10	100	10	9.5	9	7	9	8.90	12.38
14	100	6	7.5	8	8	9.5	7.80	16.12
18	100	11	8	8.5	10	5	8.50	13.58
22	100	8	8	8	9	7	8.00	15.33
0	100	14	11	11.5	10.5	8.5	11.10	7.96
2	100	7	7.5	9	9.5	7	8.00	15.33
4	100	7	8	10	8	9	8.40	13.90
6	100	9.5	7.5	9	8.5	7	8.30	14.24
8	100	8	8	7.5	9	7	7.90	15.72
10	100	8	6	7	9	8.5	7.70	16.55
14	100	5	9	8.5	6	8	7.30	18.41
18	100	5	6	5.5	8	6	6.10	26.36

## Water Content

Core number M100mb

Site location Monterey Bay

Date Thursday June 1st

Technicians Tim, Priscilla

Depth (cm)	Tare Weight (g)	Humide Weight (g)	Dry Weight (g)	H2O Content (w%)	w% corrected	Density (kg/m3)
1	6.30	22.80	19.10	28.91	30.03	1898.43
3.25	4.39	21.70	17.95	27.65	28.72	1915.96
5.5	4.40	21.57	17.95	26.72	27.74	1929.57
7.5	4.27	20.14	16.82	26.45	27.47	1933.43
9.5	4.33	21.65	18.15	25.33	26.29	1950.45
12.5	4.38	22.55	18.65	27.33	28.38	1920.63
16.5	4.48	23.34	18.65	33.10	34.43	1844.21
19.75	4.27	30.06	23.49	34.18	35.57	1831.21
1	4.46	26.38	21.21	30.87	32.09	1872.26
3	4.49	22.70	18.35	31.39	32.63	1865.57
5	4.43	20.81	16.78	32.63	33.94	1849.93
7	4.46	19.22	15.65	31.90	33.18	1859.00
9	4.41	22.61	18.23	31.69	32.96	1861.66
12	4.50	25.02	20.57	27.69	28.76	1915.44
16	6.38	33.48	27.58	27.83	28.91	1913.47
21	4.50	28.37	23.19	27.72	28.79	1915.10
1	4.48	22.27	18.33	28.45	29.55	1904.78
3	4.34	21.12	17.49	27.60	28.67	1916.68
5	4.42	20.50	17.12	26.61	27.63	1931.06
7	4.52	18.75	15.18	33.49	34.84	1839.47
9	4.37	17.54	14.74	27.00	28.04	1925.40
12	4.37	24.07	19.60	29.35	30.50	1892.37
16.5	4.48	18.92	15.60	29.86	31.03	1885.56
1	4.39	17.49	14.73	26.69	27.72	1929.91
3	4.40	15.83	13.55	24.92	25.86	1956.75
5	4.33	23.75	19.37	29.12	30.26	1895.47
7	4.44	20.49	16.46	33.53	34.88	1839.02
9	4.37	24.45	19.84	29.80	30.97	1886.31
12	4.29	23.61	18.89	32.33	33.62	1853.68
16	4.48	28.69	23.96	24.28	25.19	1966.75
20	4.45	23.60	19.79	24.84	25.77	1958.01
24	4.32	28.25	23.25	26.41	27.42	1934.04
1	6.70	20.43	17.39	28.44	29.54	1904.92
3	6.35	28.36	23.62	27.45	28.50	1918.95
5	4.31	18.07	14.81	31.05	32.28	1869.91
7	6.63	26.80	22.30	28.72	29.84	1901.04
9	4.41	20.52	16.94	28.57	29.68	1903.06
12.5	6.45	23.88	19.96	29.02	30.15	1896.93
1	4.29	26.54	20.86	34.28	35.67	1830.08
3	4.37	24.28	19.67	30.13	31.32	1881.90
5	4.38	26.71	21.92	27.31	28.36	1920.93
7	4.30	27.00	22.33	25.90	26.89	1941.69
9	4.48	24.61	19.91	30.46	31.66	1877.56
12	4.39	26.18	21.69	25.95	26.94	1940.90
16	4.40	24.33	20.00	27.76	28.83	1914.52
19.5	4.31	21.98	17.68	32.16	33.45	1855.76
1	6.32	22.23	18.32	32.58	33.89	1850.52
3	4.46	22.33	18.47	27.55	28.61	1917.44
5	4.50	23.63	19.85	24.63	25.55	1961.32
7	4.39	24.90	20.54	27.00	28.03	1925.45
9	6.19	26.07	21.93	26.30	27.31	1935.68
12	4.42	22.96	19.12	26.12	27.12	1938.37
16	4.41	23.35	19.23	27.80	28.88	1913.89
21	4.30	25.40	20.12	33.38	34.72	1840.85

## Water Content

Core number M100mb  
 Site location Monterey Bay  
 Date Thursday June 1st  
 Technicians Tim, Priscilla

Depth (cm)	Tare Weight (g)	Humide Weight (g)	Dry Weight (g)	H2O Content (w%)	w% corrected	Density (kg/m3)
1	4.32	20.53	16.48	33.31	34.65	1841.69
3	4.34	26.24	21.55	27.25	28.30	1921.76
5	4.34	20.40	17.06	26.26	27.26	1936.35
7	6.31	29.48	24.71	25.92	26.91	1941.35
9	4.44	19.24	16.74	20.33	21.06	2033.83
12	4.36	28.42	24.05	22.19	23.01	2001.04
16	4.50	20.85	17.35	27.24	28.29	1921.96
19.5	4.50	27.73	22.84	26.66	27.68	1930.34
1	4.42	22.95	18.49	31.70	32.96	1861.59
3	4.27	24.77	19.91	31.07	32.31	1869.57
5	4.27	19.75	16.03	31.63	32.89	1862.42
7	4.50	26.00	21.24	28.43	29.54	1904.96
9	6.36	26.46	21.78	30.35	31.55	1879.00
13	4.40	22.90	18.57	30.56	31.77	1876.28
19	6.42	31.67	26.06	28.56	29.68	1903.16
1	4.37	21.40	18.04	24.58	25.50	1962.04
3	4.45	23.39	19.17	28.67	29.78	1901.71
5	4.45	20.16	16.96	25.58	26.55	1946.57
7	4.46	22.20	18.48	26.53	27.55	1932.25
9	4.37	22.41	18.92	23.99	24.88	1971.46
12	4.33	25.47	22.18	18.43	19.09	2069.28
16	4.38	26.77	22.48	23.70	24.59	1976.04
20	4.45	24.86	19.85	32.53	33.84	1851.15
23	4.52	20.27	16.65	29.84	31.02	1885.73
1	4.38	29.57	24.09	27.80	28.88	1913.85
3	4.42	19.36	16.65	22.16	22.98	2001.64
5	6.47	27.98	23.29	27.88	28.96	1912.71
7	4.30	25.00	20.46	28.09	29.18	1909.74
9	4.42	23.95	19.76	27.31	28.37	1920.85
12	6.26	26.79	22.10	29.61	30.77	1888.88
16	4.45	24.73	20.15	29.17	30.31	1894.79
20.5	4.48	29.63	24.19	27.60	28.67	1916.75



\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*

DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #1 Core #1      Date, Time: 06-21-2000      11:27:53  
 Speed mode: Rigorous

-----  
 Mine characteristics,      55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	0
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE1

Layer #	Depth to base(m)	Density (kg/m^3)	Bearing strength(Pa)
1	.02	1898.43	14240
2	.045	1915.96	18920
3	.065	1929.57	20020
4	.085	1933.43	17440
5	.105	1950.45	20020
6	.145	1920.63	34920
7	.185	1844.21	24720
8	5	1844.21	24720

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	0.000
0.510	0.108	0.411	0.000	0.000	0.000
1.010	0.407	0.764	0.000	0.000	0.000
1.510	0.862	1.039	0.000	0.000	0.000
2.010	1.435	1.235	0.000	0.000	0.000
2.510	2.088	1.365	0.000	0.000	0.000
3.010	2.793	1.448	0.000	0.000	0.000
3.510	3.532	1.499	0.000	0.000	0.000
4.010	4.290	1.531	0.000	0.000	0.000
4.500	5.045	1.549	0.000	0.000	0.000
5.000	5.822	1.560	0.000	0.000	0.000
5.500	6.604	1.567	0.000	0.000	0.000
6.000	7.389	1.571	0.000	0.000	0.000
6.500	8.175	1.573	0.000	0.000	0.000
7.000	8.962	1.575	0.000	0.000	0.000
7.500	9.750	1.575	0.000	0.000	0.000
8.000	10.537	1.576	0.000	0.000	0.000
8.500	11.325	1.576	0.000	0.000	0.000
8.860	11.893	1.576	0.000	0.000	0.000
Accumulated transverse movement			0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.576	0.000	0.000	0.000
0.103	0.096	0.314	-0.004	0.019	0.002
0.126	0.100	0.019	-0.004	0.020	0.001

# BURIAL RESULT:

Depth of burial: 0.100 metres

Height protruding: 0.777 metres

Area exposed: 1.780 sq m ( 79% of total )

Volume exposed: 0.2267 cu m ( 89% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #1 Core #2      Date, Time: 06-21-2000      11:28:34  
 Speed mode: Rigorous

-----  
 Mine characteristics,      55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	0
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE2

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1872.26	7960
2	.04	1865.57	15330
3	.06	1849.93	13900
4	.08	1859	14240
5	.1	1862	15720
6	.14	1915	16550
7	.18	1913	18410
8	5	1913	18410

-----

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	0.000
0.510	0.108	0.411	0.000	0.000	0.000
1.010	0.407	0.764	0.000	0.000	0.000
1.510	0.862	1.039	0.000	0.000	0.000
2.010	1.435	1.235	0.000	0.000	0.000
2.510	2.088	1.365	0.000	0.000	0.000
3.010	2.793	1.448	0.000	0.000	0.000
3.510	3.532	1.499	0.000	0.000	0.000
4.010	4.290	1.531	0.000	0.000	0.000
4.500	5.045	1.549	0.000	0.000	0.000
5.000	5.822	1.560	0.000	0.000	0.000
5.500	6.604	1.567	0.000	0.000	0.000
6.000	7.389	1.571	0.000	0.000	0.000
6.500	8.175	1.573	0.000	0.000	0.000
7.000	8.962	1.575	0.000	0.000	0.000
7.500	9.750	1.575	0.000	0.000	0.000
8.000	10.537	1.576	0.000	0.000	0.000
8.500	11.325	1.576	0.000	0.000	0.000
8.860	11.893	1.576	0.000	0.000	0.000
Accumulated transverse movement			0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.576	0.000	0.000	0.000
0.103	0.112	0.559	-0.003	0.015	0.001
0.151	0.126	0.046	0.005	-0.022	-0.001

# BURIAL RESULT:

Depth of burial: 0.126 metres

Height protruding: 0.751 metres

Area exposed: 1.729 sq m ( 76% of total )

Volume exposed: 0.2191 cu m ( 86% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #1 Core #3 Date, Time: 06-21-2000 11:29:12  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	0
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE3

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1904.78	12380
2	.04	1917	14590
3	.06	1931	14950
4	.08	1839	20600
5	.1	1925	30190
6	.14	1892	29670
7	.18	1886	28180
8	5	1886	28180

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	0.000
0.510	0.108	0.411	0.000	0.000	0.000
1.010	0.407	0.764	0.000	0.000	0.000
1.510	0.862	1.039	0.000	0.000	0.000
2.010	1.435	1.235	0.000	0.000	0.000
2.510	2.088	1.365	0.000	0.000	0.000
3.010	2.793	1.448	0.000	0.000	0.000
3.510	3.532	1.499	0.000	0.000	0.000
4.010	4.290	1.531	0.000	0.000	0.000
4.500	5.045	1.549	0.000	0.000	0.000
5.000	5.822	1.560	0.000	0.000	0.000
5.500	6.604	1.567	0.000	0.000	0.000
6.000	7.389	1.571	0.000	0.000	0.000
6.500	8.175	1.573	0.000	0.000	0.000
7.000	8.962	1.575	0.000	0.000	0.000
7.500	9.750	1.575	0.000	0.000	0.000
8.000	10.537	1.576	0.000	0.000	0.000
8.500	11.325	1.576	0.000	0.000	0.000
8.860	11.893	1.576	0.000	0.000	0.000
Accumulated transverse movement			0.0 m		

## SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.576	0.000	0.000	0.000
0.102	0.098	0.148	0.003	-0.014	-0.001
0.107	0.098	0.049	0.003	-0.014	-0.001

## BURIAL RESULT:

Depth of burial: 0.098 metres

Height protruding: 0.778 metres

Area exposed: 1.782 sq m ( 79% of total )

Volume exposed: 0.2270 cu m ( 89% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #2 Core #1 Date, Time: 06-21-2000 11:30:06  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

Sediment characteristics: CORE1

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1898.43	14240
2	.045	1915.96	18920
3	.065	1929.57	20020
4	.085	1933.43	17440
5	.105	1950.45	20020
6	.145	1920.63	34920
7	.185	1844.21	24720
8	5	1844.21	24720

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.103	0.106	0.350	0.004	-0.011	89.990
0.121	0.109	0.047	-0.003	0.008	89.993

# BURIAL RESULT:

Depth of burial: 0.109 metres

Height protruding: 0.500 metres

Area exposed: 1.723 sq m ( 76% of total )

Volume exposed: 0.2246 cu m ( 88% of total )



\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #2 Core #2 Date, Time: 06-21-2000 11:30:50  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

Sediment characteristics: CORE2

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1872.26	7960
2	.04	1865.57	15330
3	.06	1849.93	13900
4	.08	1859	14240
5	.1	1862	15720
6	.14	1915	16550
7	.18	1913	18410
8	5	1913	18410

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

## SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.100	0.117	0.623	0.001	-0.004	89.996
0.145	0.131	0.048	-0.004	0.011	89.993

## BURIAL RESULT:

Depth of burial: 0.131 metres

Height protruding: 0.479 metres

Area exposed: 1.656 sq m ( 73% of total )

Volume exposed: 0.2155 cu m ( 84% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #2 Core #3 Date, Time: 06-21-2000 11:31:24  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

Sediment characteristics: CORE3

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1904.78	12380
2	.04	1917	14590
3	.06	1931	14950
4	.08	1839	20600
5	.1	1925	30190
6	.14	1892	29670
7	.18	1886	28180
8	5	1886	28180

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.101	0.108	0.341	-0.003	0.008	89.993
0.117	0.111	0.044	-0.002	0.006	89.995

# BURIAL RESULT:

Depth of burial: 0.111 metres

Height protruding: 0.499 metres

Area exposed: 1.718 sq m ( 76% of total )

Volume exposed: 0.2239 cu m ( 88% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #3 Core #1 Date, Time: 06-21-2000 11:32:15  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE1

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1898.43	14240
2	.045	1915.96	18920
3	.065	1929.57	20020
4	.085	1933.43	17440
5	.105	1950.45	20020
6	.145	1920.63	34920
7	.185	1844.21	24720
8	5	1844.21	24720

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.103	0.106	0.350	0.004	-0.011	89.990
0.121	0.109	0.047	-0.003	0.008	89.993

# BURIAL RESULT:

Depth of burial: 0.109 metres

Height protruding: 0.500 metres

Area exposed: 1.723 sq m ( 76% of total )

Volume exposed: 0.2246 cu m ( 88% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #3 Core #2      Date, Time: 06-21-2000      11:32:49  
 Speed mode: Rigorous

-----  
 Mine characteristics,      55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE2

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1872.26	7960
2	.04	1865.57	15330
3	.06	1849.93	13900
4	.08	1859	14240
5	.1	1862	15720
6	.14	1915	16550
7	.18	1913	18410
8	5	1913	18410

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.100	0.117	0.623	-0.002	0.005	89.997
0.145	0.131	0.048	0.000	-0.000	89.990

# BURIAL RESULT:

Depth of burial: 0.131 metres

Height protruding: 0.479 metres

Area exposed: 1.656 sq m ( 73% of total )

Volume exposed: 0.2155 cu m ( 84% of total )



\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #3 Core #3      Date, Time: 06-21-2000      11:33:18  
 Speed mode: Rigorous

-----  
 Mine characteristics,      55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE3

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1904.78	12380
2	.04	1917	14590
3	.06	1931	14950
4	.08	1839	20600
5	.1	1925	30190
6	.14	1892	29670
7	.18	1886	28180
8	5	1886	28180

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.101	0.108	0.341	-0.003	0.008	89.993
0.117	0.111	0.044	-0.002	0.006	89.995

# BURIAL RESULT:

Depth of burial: 0.111 metres

Height protruding: 0.499 metres

Area exposed: 1.718 sq m ( 76% of total )

Volume exposed: 0.2239 cu m ( 88% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #4 Core #1 Date, Time: 06-21-2000 11:34:02  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE1

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1898.43	14240
2	.045	1915.96	18920
3	.065	1929.57	20020
4	.085	1933.43	17440
5	.105	1950.45	20020
6	.145	1920.63	34920
7	.185	1844.21	24720
8	5	1844.21	24720

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.103	0.106	0.350	0.004	-0.011	89.990
0.121	0.109	0.047	-0.003	0.008	89.993

# BURIAL RESULT:

Depth of burial: 0.109 metres

Height protruding: 0.500 metres

Area exposed: 1.723 sq m ( 76% of total )

Volume exposed: 0.2246 cu m ( 88% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #4 Core #2      Date, Time: 06-21-2000      11:34:31  
 Speed mode: Rigorous

-----  
 Mine characteristics,      55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE2

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1872.26	7960
2	.04	1865.57	15330
3	.06	1849.93	13900
4	.08	1859	14240
5	.1	1862	15720
6	.14	1915	16550
7	.18	1913	18410
8	5	1913	18410

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.100	0.117	0.623	-0.002	0.005	89.997
0.145	0.131	0.048	0.000	-0.000	89.990

# BURIAL RESULT:

Depth of burial: 0.131 metres

Height protruding: 0.479 metres

Area exposed: 1.656 sq m ( 73% of total )

Volume exposed: 0.2155 cu m ( 84% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #4 Core #3      Date, Time: 06-21-2000      11:35:03  
 Speed mode: Rigorous

-----  
 Mine characteristics,      55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE3

Layer #	Depth to base(m)	Density (kg/m^3)	Bearing strength(Pa)
1	.02	1904.78	12380
2	.04	1917	14590
3	.06	1931	14950
4	.08	1839	20600
5	.1	1925	30190
6	.14	1892	29670
7	.18	1886	28180
8	5	1886	28180

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.101	0.108	0.341	-0.003	0.008	89.993
0.117	0.111	0.044	-0.002	0.006	89.995

# BURIAL RESULT:

Depth of burial: 0.111 metres

Height protruding: 0.499 metres

Area exposed: 1.718 sq m ( 76% of total )

Volume exposed: 0.2239 cu m ( 88% of total )



\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #5 Core #1      Date, Time: 06-21-2000      11:35:56  
 Speed mode: Rigorous

-----  
 Mine characteristics,      55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.192
Temperature (deg C):	12

Sediment characteristics: CORE1

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1898.43	14240
2	.045	1915.96	18920
3	.065	1929.57	20020
4	.085	1933.43	17440
5	.105	1950.45	20020
6	.145	1920.63	34920
7	.185	1844.21	24720
8	5	1844.21	24720

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.330	12.197	1.564	-0.000	0.000	90.000

Accumulated transverse movement -0.0 m

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.103	0.106	0.350	0.004	-0.011	89.990
0.121	0.109	0.047	-0.003	0.008	89.993

# BURIAL RESULT:

Depth of burial: 0.109 metres

Height protruding: 0.500 metres

Area exposed: 1.723 sq m ( 76% of total )

Volume exposed: 0.2246 cu m ( 88% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #5 Core #2      Date, Time: 06-21-2000      11:36:24  
 Speed mode: Rigorous

-----  
 Mine characteristics,      55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.192
Temperature (deg C):	12

Sediment characteristics: CORE2

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1872.26	7960
2	.04	1865.57	15330
3	.06	1849.93	13900
4	.08	1859	14240
5	.1	1862	15720
6	.14	1915	16550
7	.18	1913	18410
8	5	1913	18410

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.330	12.197	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.100	0.117	0.623	0.001	-0.004	89.996
0.145	0.131	0.048	-0.004	0.011	89.993

# BURIAL RESULT:

Depth of burial: 0.131 metres  
Height protruding: 0.479 metres  
Area exposed: 1.656 sq m ( 73% of total )  
Volume exposed: 0.2155 cu m ( 84% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #5 Core #3      Date, Time: 06-21-2000      11:37:02  
 Speed mode: Rigorous

-----  
 Mine characteristics,      55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.192
Temperature (deg C):	12

Sediment characteristics: CORE3

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1904.78	12380
2	.04	1917	14590
3	.06	1931	14950
4	.08	1839	20600
5	.1	1925	30190
6	.14	1892	29670
7	.18	1886	28180
8	5	1886	28180

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.330	12.197	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.101	0.108	0.341	-0.003	0.008	89.993
0.117	0.111	0.044	-0.002	0.006	89.995

# BURIAL RESULT:

Depth of burial: 0.111 metres

Height protruding: 0.499 metres

Area exposed: 1.718 sq m ( 76% of total )

Volume exposed: 0.2239 cu m ( 88% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #6 Core #5      Date, Time: 06-21-2000      13:20:37  
 Speed mode: Rigorous

-----  
 Mine characteristics,      55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE5

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	0	0	0
2	.02	1930	10210
3	.04	1957	16980
4	.06	1895	18920
5	.1	1854	20600
6	.14	1966	12670
7	.18	1958	18410
8	.22	1934	14240
9	5	1934	14240

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.103	0.109	0.405	-0.000	0.000	89.991
0.132	0.115	0.012	0.001	-0.004	89.993

# BURIAL RESULT:

Depth of burial: 0.115 metres

Height protruding: 0.495 metres

Area exposed: 1.706 sq m ( 75% of total )

Volume exposed: 0.2223 cu m ( 87% of total )



\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #6 Core #6 Date, Time: 06-21-2000 13:21:38  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE6

Layer #	Depth to base(m)	Density (kg/m^3)	Bearing strength(Pa)
1	.02	1905	2090
2	.04	1919	22520
3	.06	1870	29160
4	.08	1901	27250
5	.1	1903	31280
6	.14	1897	17910
7	5	1897	17910

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.102	0.102	0.134	0.000	-0.001	89.993
0.107	0.102	0.035	0.001	-0.002	89.994

# BURIAL RESULT:

Depth of burial: 0.102 metres

Height protruding: 0.508 metres

Area exposed: 1.748 sq m ( 77% of total )

Volume exposed: 0.2277 cu m ( 89% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #6 Core #7      Date, Time: 06-21-2000      13:22:07  
 Speed mode: Rigorous

-----  
 Mine characteristics,      55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE7

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1830	1080
2	.04	1882	12670
3	.06	1921	16120
4	.08	1942	16980
5	.1	1878	20020
6	.14	1941	26360
7	.18	1915	21220
8	.22	1856	14950
9	5	1856	14950

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.102	0.120	0.537	-0.001	0.003	89.998
0.131	0.128	0.041	0.001	-0.002	89.994

# BURIAL RESULT:

Depth of burial: 0.128 metres

Height protruding: 0.482 metres

Area exposed: 1.665 sq m ( 74% of total )

Volume exposed: 0.2168 cu m ( 85% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #6 Core #8      Date, Time: 06-21-2000      13:22:41  
 Speed mode: Rigorous

-----  
 Mine characteristics,      55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE8

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1851	1920
2	.04	1917	20020
3	.06	1961	22520
4	.08	1925	31280
5	.1	1936	29160
6	.14	1938	29160
7	.18	1914	33640
8	.22	1841	21850
9	5	1841	21850

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.102	0.105	0.176	-0.003	0.008	89.993
0.110	0.106	0.028	0.001	-0.002	89.993

# BURIAL RESULT:

Depth of burial: 0.106 metres

Height protruding: 0.504 metres

Area exposed: 1.735 sq m ( 77% of total )

Volume exposed: 0.2261 cu m ( 88% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #7 Core #5      Date, Time: 06-21-2000      13:23:41  
 Speed mode: Rigorous

-----  
 Mine characteristics,      55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.192
Temperature (deg C):	12

Sediment characteristics: CORE5

Layer #	Depth to base(m)	Density (kg/m^3)	Bearing strength(Pa)
1	0	0	0
2	.02	1930	10210
3	.04	1957	16980
4	.06	1895	18920
5	.1	1854	20600
6	.14	1966	12670
7	.18	1958	18410
8	.22	1934	14240
9	5	1934	14240

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.330	12.197	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.102	0.109	0.405	-0.000	0.000	89.991
0.132	0.115	0.012	0.001	-0.004	89.988

# BURIAL RESULT:

Depth of burial: 0.115 metres

Height protruding: 0.495 metres

Area exposed: 1.706 sq m ( 75% of total )

Volume exposed: 0.2223 cu m ( 87% of total )



\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #7 Core #6 Date, Time: 06-21-2000 13:24:12  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.192
Temperature (deg C):	12

Sediment characteristics: CORE6

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1905	2090
2	.04	1919	22520
3	.06	1870	29160
4	.08	1901	27250
5	.1	1903	31280
6	.14	1897	17910
7	5	1897	17910

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.330	12.197	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.102	0.102	0.134	0.000	-0.001	89.993
0.107	0.102	0.036	0.001	-0.002	89.994

# BURIAL RESULT:

Depth of burial: 0.102 metres

Height protruding: 0.508 metres

Area exposed: 1.748 sq m ( 77% of total )

Volume exposed: 0.2277 cu m ( 89% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #7 Core #7 Date, Time: 06-21-2000 13:24:41  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.192
Temperature (deg C):	12

Sediment characteristics: CORE7

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1830	1080
2	.04	1882	12670
3	.06	1921	16120
4	.08	1942	16980
5	.1	1878	20020
6	.14	1941	26360
7	.18	1915	21220
8	.22	1856	14950
9	5	1856	14950

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.330	12.197	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.102	0.120	0.538	-0.001	0.003	89.998
0.131	0.128	0.041	0.001	-0.002	89.994

# BURIAL RESULT:

Depth of burial: 0.128 metres

Height protruding: 0.482 metres

Area exposed: 1.665 sq m ( 74% of total )

Volume exposed: 0.2168 cu m ( 85% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #7 Core #8      Date, Time: 06-21-2000      13:25:12  
 Speed mode: Rigorous

-----  
 Mine characteristics,      55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.192
Temperature (deg C):	12

Sediment characteristics: CORE8

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1851	1920
2	.04	1917	20020
3	.06	1961	22520
4	.08	1925	31280
5	.1	1936	29160
6	.14	1938	29160
7	.18	1914	33640
8	.22	1841	21850
9	5	1841	21850

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.330	12.197	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.102	0.105	0.176	-0.003	0.008	89.993
0.110	0.106	0.028	0.001	-0.002	89.993

# BURIAL RESULT:

Depth of burial: 0.106 metres

Height protruding: 0.504 metres

Area exposed: 1.735 sq m ( 77% of total )

Volume exposed: 0.2261 cu m ( 88% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #8 Core #5 Date, Time: 06-21-2000 13:26:13  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE5

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	0	0	0
2	.02	1930	10210
3	.04	1957	16980
4	.06	1895	18920
5	.1	1854	20600
6	.14	1966	12670
7	.18	1958	18410
8	.22	1934	14240
9	5	1934	14240

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.103	0.109	0.405	-0.000	0.000	89.991
0.132	0.115	0.012	0.001	-0.004	89.993

# BURIAL RESULT:

Depth of burial: 0.115 metres

Height protruding: 0.495 metres

Area exposed: 1.706 sq m ( 75% of total )

Volume exposed: 0.2223 cu m ( 87% of total )



\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #8 Core #6      Date, Time: 06-21-2000      13:26:45  
 Speed mode: Rigorous

-----  
 Mine characteristics,      55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE6

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1905	2090
2	.04	1919	22520
3	.06	1870	29160
4	.08	1901	27250
5	.1	1903	31280
6	.14	1897	17910
7	5	1897	17910

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.102	0.102	0.134	0.000	-0.001	89.993
0.107	0.102	0.035	0.001	-0.002	89.994

# BURIAL RESULT:

Depth of burial: 0.102 metres

Height protruding: 0.508 metres

Area exposed: 1.748 sq m ( 77% of total )

Volume exposed: 0.2277 cu m ( 89% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #8 Core #7 Date, Time: 06-21-2000 13:27:30  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE7

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1830	1080
2	.04	1882	12670
3	.06	1921	16120
4	.08	1942	16980
5	.1	1878	20020
6	.14	1941	26360
7	.18	1915	21220
8	.22	1856	14950
9	5	1856	14950

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.102	0.120	0.537	-0.001	0.003	89.998
0.131	0.128	0.041	0.001	-0.002	89.994

# BURIAL RESULT:

Depth of burial: 0.128 metres

Height protruding: 0.482 metres

Area exposed: 1.665 sq m ( 74% of total )

Volume exposed: 0.2168 cu m ( 85% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #8 Core #8 Date, Time: 06-21-2000 13:28:08  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE8

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1851	1920
2	.04	1917	20020
3	.06	1961	22520
4	.08	1925	31280
5	.1	1936	29160
6	.14	1938	29160
7	.18	1914	33640
8	.22	1841	21850
9	5	1841	21850

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.102	0.105	0.176	-0.003	0.008	89.993
0.110	0.106	0.028	0.001	-0.002	89.993

# BURIAL RESULT:

Depth of burial: 0.106 metres

Height protruding: 0.504 metres

Area exposed: 1.735 sq m ( 77% of total )

Volume exposed: 0.2261 cu m ( 88% of total )

\*\*\*\*\*

\*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*

DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #9 Core #5 Date, Time: 06-21-2000 13:28:57  
Speed mode: Rigorous

-----  
Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE5

Layer #	Depth to base(m)	Density (kg/m^3)	Bearing strength(Pa)
1	0	0	0
2	.02	1930	10210
3	.04	1957	16980
4	.06	1895	18920
5	.1	1854	20600
6	.14	1966	12670
7	.18	1958	18410
8	.22	1934	14240
9	5	1934	14240

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.103	0.109	0.405	-0.000	0.000	89.991
0.132	0.115	0.012	0.001	-0.004	89.993

# BURIAL RESULT:

Depth of burial: 0.115 metres  
 Height protruding: 0.495 metres  
 Area exposed: 1.706 sq m ( 75% of total )  
 Volume exposed: 0.2223 cu m ( 87% of total )



\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #9 Core #6 Date, Time: 06-21-2000 13:29:31  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE6

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1905	2090
2	.04	1919	22520
3	.06	1870	29160
4	.08	1901	27250
5	.1	1903	31280
6	.14	1897	17910
7	5	1897	17910

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.102	0.102	0.134	0.000	-0.001	89.993
0.107	0.102	0.035	0.001	-0.002	89.994

# BURIAL RESULT:

Depth of burial: 0.102 metres

Height protruding: 0.508 metres

Area exposed: 1.748 sq m ( 77% of total )

Volume exposed: 0.2277 cu m ( 89% of total )

\*\*\*\*\*  
 NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #9 Core #7 Date, Time: 06-21-2000 13:30:00  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE7

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1830	1080
2	.04	1882	12670
3	.06	1921	16120
4	.08	1942	16980
5	.1	1878	20020
6	.14	1941	26360
7	.18	1915	21220
8	.22	1856	14950
9	5	1856	14950

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.102	0.120	0.537	-0.001	0.003	89.998
0.131	0.128	0.041	0.001	-0.002	89.994

# BURIAL RESULT:

Depth of burial: 0.128 metres

Height protruding: 0.482 metres

Area exposed: 1.665 sq m ( 74% of total )

Volume exposed: 0.2168 cu m ( 85% of total )

\*\*\*\*\*  
 NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #9 Core #8 Date, Time: 06-21-2000 13:30:39  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	11.887
Temperature (deg C):	12

Sediment characteristics: CORE8

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1851	1920
2	.04	1917	20020
3	.06	1961	22520
4	.08	1925	31280
5	.1	1936	29160
6	.14	1938	29160
7	.18	1914	33640
8	.22	1841	21850
9	5	1841	21850

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.140	11.900	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.102	0.105	0.176	-0.003	0.008	89.993
0.110	0.106	0.028	0.001	-0.002	89.993

# BURIAL RESULT:

Depth of burial: 0.106 metres

Height protruding: 0.504 metres

Area exposed: 1.735 sq m ( 77% of total )

Volume exposed: 0.2261 cu m ( 88% of total )

\*\*\*\*\*  
 NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #10 Core #5 Date, Time: 06-21-2000 13:31:32  
 Speed mode: Rigorous

Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

#### RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

#### Sediment characteristics: CORE5

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	0	0	0
2	.02	1930	10210
3	.04	1957	16980
4	.06	1895	18920
5	.1	1854	20600
6	.14	1966	12670
7	.18	1958	18410
8	.22	1934	14240
9	5	1934	14240

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.102	0.109	0.405	-0.000	0.000	89.991
0.132	0.115	0.012	0.001	-0.004	89.988

# BURIAL RESULT:

Depth of burial: 0.115 metres

Height protruding: 0.495 metres

Area exposed: 1.706 sq m ( 75% of total )

Volume exposed: 0.2223 cu m ( 87% of total )



\*\*\*\*\*

\*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*

DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #10 Core #6 Date, Time: 06-21-2000 13:32:01

Speed mode: Rigorous

-----  
Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

Sediment characteristics: CORE6

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1905	2090
2	.04	1919	22520
3	.06	1870	29160
4	.08	1901	27250
5	.1	1903	31280
6	.14	1897	17910
7	5	1897	17910

-----

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.102	0.102	0.134	0.000	-0.001	89.993
0.107	0.102	0.036	0.001	-0.002	89.994

# BURIAL RESULT:

Depth of burial: 0.102 metres  
Height protruding: 0.508 metres  
Area exposed: 1.748 sq m ( 77% of total )  
Volume exposed: 0.2277 cu m ( 89% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #10 Core #7 Date, Time: 06-21-2000 13:32:29  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

Sediment characteristics: CORE7

Layer #	Depth to base(m)	Density (kg/m^3)	Bearing strength(Pa)
1	.02	1830	1080
2	.04	1882	12670
3	.06	1921	16120
4	.08	1942	16980
5	.1	1878	20020
6	.14	1941	26360
7	.18	1915	21220
8	.22	1856	14950
9	5	1856	14950

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.102	0.120	0.538	-0.001	0.003	89.998
0.131	0.128	0.041	0.001	-0.002	89.994

# BURIAL RESULT:

Depth of burial: 0.128 metres

Height protruding: 0.482 metres

Area exposed: 1.665 sq m ( 74% of total )

Volume exposed: 0.2168 cu m ( 85% of total )

\*\*\*\*\*  
 NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #10 Core #8 Date, Time: 06-21-2000 13:32:57  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

Sediment characteristics: CORE8

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1851	1920
2	.04	1917	20020
3	.06	1961	22520
4	.08	1925	31280
5	.1	1936	29160
6	.14	1938	29160
7	.18	1914	33640
8	.22	1841	21850
9	5	1841	21850

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.102	0.105	0.176	-0.003	0.008	89.993
0.110	0.106	0.028	0.001	-0.002	89.993

# BURIAL RESULT:

Depth of burial: 0.106 metres

Height protruding: 0.504 metres

Area exposed: 1.735 sq m ( 77% of total )

Volume exposed: 0.2261 cu m ( 88% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #11 Core #9 Date, Time: 06-22-2000 09:35:56  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.192
Temperature (deg C):	12

Sediment characteristics: CORE9

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
-----	-----	-----	-----
1	.02	1842	1880
2	.04	1922	16550
3	.06	1936	21220
4	.08	1941	16980
5	.1	2034	18920
6	.14	2001	13900
7	.18	1922	20600
8	.22	1930	23220
9	5	1930	23220

-----

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.330	12.197	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.103	0.116	0.516	0.001	-0.002	89.993
0.141	0.126	0.023	0.003	-0.009	89.993

# BURIAL RESULT:

Depth of burial: 0.126 metres

Height protruding: 0.484 metres

Area exposed: 1.671 sq m ( 74% of total )

Volume exposed: 0.2177 cu m ( 85% of total )



\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #11 Core #10 Date, Time: 06-22-2000 09:36:37  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.192
Temperature (deg C):	12

Sediment characteristics: CORE10

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	0	0	0
2	.02	1862	1800
3	.04	1870	24720
4	.06	1862	32430
5	.08	1905	23950
6	.1	1879	31280
7	.14	1876	29160
8	.18	1903	20600
9	5	1903	20600

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.330	12.197	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.100	0.100	0.140	0.003	-0.009	89.991
0.105	0.100	0.041	-0.003	0.008	89.993

# BURIAL RESULT:

Depth of burial: 0.100 metres

Height protruding: 0.509 metres

Area exposed: 1.753 sq m ( 78% of total )

Volume exposed: 0.2283 cu m ( 89% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #12 Core #9 Date, Time: 06-22-2000 09:37:26  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

Sediment characteristics: CORE9

Layer #	Depth to base(m)	Density (kg/m^3)	Bearing strength(Pa)
1	.02	1842	1880
2	.04	1922	16550
3	.06	1936	21220
4	.08	1941	16980
5	.1	2034	18920
6	.14	2001	13900
7	.18	1922	20600
8	.22	1930	23220
9	5	1930	23220

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.103	0.116	0.516	0.001	-0.002	89.993
0.141	0.126	0.023	0.003	-0.009	89.993

# BURIAL RESULT:

Depth of burial: 0.126 metres

Height protruding: 0.484 metres

Area exposed: 1.671 sq m ( 74% of total )

Volume exposed: 0.2177 cu m ( 85% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #12 Core #10 Date, Time: 06-22-2000 09:37:55  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

Sediment characteristics: CORE10

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	0	0	0
2	.02	1862	1800
3	.04	1870	24720
4	.06	1862	32430
5	.08	1905	23950
6	.1	1879	31280
7	.14	1876	29160
8	.18	1903	20600
9	5	1903	20600

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.100	0.100	0.140	0.003	-0.009	89.991
0.105	0.100	0.041	-0.003	0.008	89.993

# BURIAL RESULT:

Depth of burial: 0.100 metres

Height protruding: 0.509 metres

Area exposed: 1.753 sq m ( 77% of total )

Volume exposed: 0.2283 cu m ( 89% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #13 Core #9      Date, Time: 06-22-2000      09:38:36  
 Speed mode: Rigorous

-----  
 Mine characteristics,      55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

Sediment characteristics: CORE9

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1842	1880
2	.04	1922	16550
3	.06	1936	21220
4	.08	1941	16980
5	.1	2034	18920
6	.14	2001	13900
7	.18	1922	20600
8	.22	1930	23220
9	5	1930	23220

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.103	0.116	0.516	0.001	-0.002	89.993
0.141	0.126	0.023	0.003	-0.009	89.993

# BURIAL RESULT:

Depth of burial: 0.126 metres

Height protruding: 0.484 metres

Area exposed: 1.671 sq m ( 74% of total )

Volume exposed: 0.2177 cu m ( 85% of total )



\*\*\*\*\*  
 NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #13 Core #10 Date, Time: 06-22-2000 09:39:05  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

Sediment characteristics: CORE10

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	0	0	0
2	.02	1862	1800
3	.04	1870	24720
4	.06	1862	32430
5	.08	1905	23950
6	.1	1879	31280
7	.14	1876	29160
8	.18	1903	20600
9	5	1903	20600

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.100	0.100	0.140	0.003	-0.009	89.991
0.105	0.100	0.041	-0.003	0.008	89.993

# BURIAL RESULT:

Depth of burial: 0.100 metres

Height protruding: 0.509 metres

Area exposed: 1.753 sq m ( 77% of total )

Volume exposed: 0.2283 cu m ( 89% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #14 Core #9 Date, Time: 06-22-2000 09:39:43  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

Sediment characteristics: CORE9

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1842	1880
2	.04	1922	16550
3	.06	1936	21220
4	.08	1941	16980
5	.1	2034	18920
6	.14	2001	13900
7	.18	1922	20600
8	.22	1930	23220
9	5	1930	23220

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.103	0.116	0.516	0.001	-0.002	89.993
0.141	0.126	0.023	0.003	-0.009	89.993

# BURIAL RESULT:

Depth of burial: 0.126 metres

Height protruding: 0.484 metres

Area exposed: 1.671 sq m ( 74% of total )

Volume exposed: 0.2177 cu m ( 85% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #14 Core #10 Date, Time: 06-22-2000 09:40:19  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

Sediment characteristics: CORE10

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	0	0	0
2	.02	1862	1800
3	.04	1870	24720
4	.06	1862	32430
5	.08	1905	23950
6	.1	1879	31280
7	.14	1876	29160
8	.18	1903	20600
9	5	1903	20600

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.100	0.100	0.140	0.003	-0.009	89.991
0.105	0.100	0.041	-0.003	0.008	89.993

# BURIAL RESULT:

Depth of burial: 0.100 metres

Height protruding: 0.509 metres

Area exposed: 1.753 sq m ( 77% of total )

Volume exposed: 0.2283 cu m ( 89% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #15 Core #9 Date, Time: 06-22-2000 09:42:37  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM  
 Mass (kg) 294.835  
 Apparent mass in water (kg) 31.873  
 Overall length (m) .8763  
 Maximum diameter (m) .6096  
 Length of taper on base (m) 0  
 Minimum taper diameter (m) .6096  
 Distance of CM from centre (m) 0  
 External surface area (sq m) 2.262  
 Volume of mine (cu m) 0.256  
 -----

RELEASE CONDITIONS

Vert vel (downward positive) 0  
 Horiz vel (rightward pos) 0  
 Angle(0 vertical, 90 horizontal) 90  
 Rotation rate(rad/sec cl'wise) 0  
 Water depth (m): 12.497  
 Temperature (deg C): 12

Sediment characteristics: CORE9

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1842	1880
2	.04	1922	16550
3	.06	1936	21220
4	.08	1941	16980
5	.1	2034	18920
6	.14	2001	13900
7	.18	1922	20600
8	.22	1930	23220
9	5	1930	23220

-----

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.103	0.116	0.516	0.001	-0.002	89.993
0.141	0.126	0.023	0.003	-0.009	89.993

# BURIAL RESULT:

Depth of burial: 0.126 metres

Height protruding: 0.484 metres

Area exposed: 1.671 sq m ( 74% of total )

Volume exposed: 0.2177 cu m ( 85% of total )



\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #15 Core #10 Date, Time: 06-22-2000 09:43:19  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

Sediment characteristics: CORE10

Layer #	Depth to base(m)	Density (kg/m^3)	Bearing strength(Pa)
1	0	0	0
2	.02	1862	1800
3	.04	1870	24720
4	.06	1862	32430
5	.08	1905	23950
6	.1	1879	31280
7	.14	1876	29160
8	.18	1903	20600
9	5	1903	20600

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.100	0.100	0.140	0.003	-0.009	89.991
0.105	0.100	0.041	-0.003	0.008	89.993

# BURIAL RESULT:

Depth of burial: 0.100 metres

Height protruding: 0.509 metres

Area exposed: 1.753 sq m ( 77% of total )

Volume exposed: 0.2283 cu m ( 89% of total )

\*\*\*\*\*  
 NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #16 Core #11 Date, Time: 06-22-2000 09:53:17  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

Sediment characteristics: CORE11

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1962	8900
2	.04	1902	16120
3	.06	1947	15330
4	.08	1932	16980
5	.1	1971	14950
6	.14	2069	12380
7	.18	1976	16120
8	.22	1851	13580
9	.26	1886	15330
10	5	1886	15330

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.101	0.115	0.577	0.001	-0.003	89.995
0.150	0.128	0.004	0.005	-0.014	89.987

# BURIAL RESULT:

Depth of burial: 0.128 metres  
Height protruding: 0.482 metres  
Area exposed: 1.665 sq m ( 74% of total )  
Volume exposed: 0.2169 cu m ( 85% of total )

\*\*\*\*\*  
 NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #17 Core #12 Date, Time: 06-22-2000 09:54:41  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

Sediment characteristics: CORE12

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1914	7960
2	.04	2002	15330
3	.06	1913	13900
4	.08	1910	14240
5	.1	1921	15720
6	.14	1889	16550
7	.18	1895	18410
8	.22	1917	26360
9	5	1917	26360

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.100	0.117	0.617	0.002	-0.005	89.996
0.145	0.130	0.041	-0.004	0.010	89.995

# BURIAL RESULT:

Depth of burial: 0.130 metres

Height protruding: 0.479 metres

Area exposed: 1.657 sq m ( 73% of total )

Volume exposed: 0.2157 cu m ( 84% of total )

\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #16 Core #12 Date, Time: 06-22-2000 09:53:52  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

Sediment characteristics: CORE12

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1914	7960
2	.04	2002	15330
3	.06	1913	13900
4	.08	1910	14240
5	.1	1921	15720
6	.14	1889	16550
7	.18	1895	18410
8	.22	1917	26360
9	5	1917	26360

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement			-0.0 m		

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.100	0.117	0.617	0.002	-0.005	89.996
0.145	0.130	0.041	-0.004	0.010	89.995

# BURIAL RESULT:

Depth of burial: 0.130 metres

Height protruding: 0.479 metres

Area exposed: 1.657 sq m ( 73% of total )

Volume exposed: 0.2157 cu m ( 84% of total )



\*\*\*\*\*  
 \*\*\*\*\* NCSC/DSE IMPACT BURIAL PREDICTION MODEL \*\*\*\*\*  
 DOTSE development version IMPACTD1 with 100 Layers, 20 March 1997

Run name: Drop #17 Core #11 Date, Time: 06-22-2000 09:55:11  
 Speed mode: Rigorous

-----  
 Mine characteristics, 55GALDRM

Mass	(kg)	294.835
Apparent mass in water	(kg)	31.873
Overall length	(m)	.8763
Maximum diameter	(m)	.6096
Length of taper on base	(m)	0
Minimum taper diameter	(m)	.6096
Distance of CM from centre	(m)	0
External surface area	(sq m)	2.262
Volume of mine	(cu m)	0.256

-----  
 RELEASE CONDITIONS

Vert vel (downward positive)	0
Horiz vel (rightward pos)	0
Angle(0 vertical, 90 horizontal)	90
Rotation rate(rad/sec cl'wise)	0
Water depth (m):	12.497
Temperature (deg C):	12

Sediment characteristics: CORE11

Layer #	Depth to base(m)	Density (kg/m <sup>3</sup> )	Bearing strength(Pa)
1	.02	1962	8900
2	.04	1902	16120
3	.06	1947	15330
4	.08	1932	16980
5	.1	1971	14950
6	.14	2069	12380
7	.18	1976	16120
8	.22	1851	13580
9	.26	1886	15330
10	5	1886	15330

# WATER PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	0.000	0.000	0.000	90.000
0.510	0.089	0.335	-0.000	0.000	90.000
1.010	0.330	0.617	-0.000	0.000	90.000
1.510	0.709	0.893	-0.000	0.000	90.000
2.010	1.216	1.117	-0.000	0.000	90.000
2.510	1.818	1.278	-0.000	0.000	90.000
3.010	2.486	1.386	-0.000	0.000	90.000
3.510	3.198	1.455	-0.000	0.000	90.000
4.010	3.938	1.498	-0.000	0.000	90.000
4.500	4.679	1.524	-0.000	0.000	90.000
5.000	5.446	1.540	-0.000	0.000	90.000
5.500	6.219	1.550	-0.000	0.000	90.000
6.000	6.995	1.556	-0.000	0.000	90.000
6.500	7.774	1.559	-0.000	0.000	90.000
7.000	8.555	1.561	-0.000	0.000	90.000
7.500	9.336	1.563	-0.000	0.000	90.000
8.000	10.117	1.563	-0.000	0.000	90.000
8.500	10.899	1.564	-0.000	0.000	90.000
9.000	11.681	1.564	-0.000	0.000	90.000
9.500	12.463	1.564	-0.000	0.000	90.000
9.530	12.510	1.564	-0.000	0.000	90.000
Accumulated transverse movement		-0.0 m		0.000	90.000

# SEDIMENT PHASE

Time (sec)	Depth (m)	Vert Vel (m/s)	Horiz Vel (m/s)	Ang Vel (rad/s)	Angle (deg)
0.000	0.000	1.564	-0.000	0.000	90.000
0.101	0.115	0.577	0.001	-0.003	89.995
0.150	0.128	0.004	0.005	-0.014	89.987

# BURIAL RESULT:

Depth of burial: 0.128 metres

Height protruding: 0.482 metres

Area exposed: 1.665 sq m ( 74% of total )

Volume exposed: 0.2169 cu m ( 85% of total )

## List of References

Arnone, R. A., and Bowen, Prediction model of the time history penetration of a cylinder through the air-water-sediment phases. NCSC TN 734-36. Naval Coastal Systems Center, Panama City, FL, 1980.

Casper, L. E., Halter, I. L., Powers, E. W., Selva, P. J., Steffens, T. W., and Willis, T. L., Knowledge-based warfare: the security strategy for the next century. *Joint Force Quarterly*, Autumn, 81-89, 1996.

Chu, P.C., E. Gottshall, and T.E. Halwachs, AEnvironmental effects on Naval warfare simulations, @ Institute of Joint Warfare Analysis, Naval Postgraduate School, Technical Report, NPS-IJWA-98-006, pp.33, 1998a.

Chu, P.C., E. Gottshall, and T.E. Halwachs, AMeteorological and oceanographic (METOC) support for determining safe current in magnetic sea mine sweeping, @ The Third International Symposium on Technology and the Mine Problem (CD-ROM), 6 pages, 1998b.

Chu. P.C., V.I. Taber, and S.D. Haeger, AA mine impact burial model sensitivity study, @ Institute of Joint Warfare Analysis, Naval Postgraduate School, Technical Report, NPS-IJWA-00-003, pp.48, 2000a.

Chu, P.C., V. Taber, and S. Haeger, AEnvironmental sensitivity study on mine impact burial prediction model @, Proceedings on The Fourth International Symposium on Technology and the Mine Problem, 10 pages, 2000b.

Gottshall, E.L, Environmental effects on warfare simulations. *Master Thesis*, Naval Postgraduate School, Monterey, CA, 1997.

Hamilton, E. L., and Bachman, R. T., Sound velocity and related properties of marine sediments. *J. Acoust. Soc. Am.*, 72(6), 1891-1904, 1982.

Hayter, E. J., Estuarine sediment bed model. *Estuarine Cohesive Sediment Dynamics*, edited by A.J. Mehta, pp. 326-359, Springer-Verlag, New York, 1986.

Krone, R. B., A study of rheological properties of estuarine sediments. *Technical Bulletin No.7, Committee of Tidal Hydraulics*. U.S. Army Corps of Engineers. Vicksburg, MS, 1963.

Taber, V., Environmental sensitivity study on mine impact burial prediction model. *Master Thesis*, Naval Postgraduate School, Monterey, CA, 1999.

Von Mises, R., *Theory of Flight*, Dover Publ., New York, 1959.

Mulhearn, P. J., Experiments on mine burial on impact-sydney harbour. *U.S. Navy J. of Underwater Acoustics*, 43, 1271-1281, 1992.

Naval Mine Warfare Engineering Activity (NMWEA), U.S. navy mine countermeasures familiarizer. Naval Coastal Systems Center, Panama City, FL, 1991.

Naval Surface Warfare Center, Mine countermeasures commander's tactical decision aid (MCM-CTDA). *Coastal Systems Station, Dahlgren Division*.

Noorany, I., Laboratory soil properties. *Handbook for Marine Geotechnical Engineering*, edited by K. Rucker, Jr., Naval Civil Engineering Laboratory, Port Hueneme, CA, 3.1-3.19, 1985.

Satkowiak, L. J., Modified NCSC impact burial prediction model with comparisons to mine drop tests. NCSC TN 486-88. Nava

## DISTRIBUTION LIST

<b>Dr. Richard Bennett</b> SEAPROBE Inc. 501 Pine Street Picayune, MS 39466	1
<b>LCDR Jim Berdeguez</b> Chief of Naval Operations 2000 Navy Pentagon N852 Room 5E 613 Washington, D.C. 20350-2000	1
<b>Mr. Scott Burleson</b> COMINELWARCOM N00TD/N80 325 5 <sup>th</sup> Street Corpus Christi, TX 78419	1
<b>CDR Chris Butler</b> ONR-IFO 223 Old Marylebone Road	1
<b>Dr. Dave Cacchione</b> Woods Hole group 1167 Oddstad Drive Redwood City, CA 94063-2605	1
<b>Dr. Michael Carron</b> N00t Naval Oceanographic Office 1002 Balch Blvd Stennis Space Center, MS 39529	1
<b>Dr. Arthur Cheng</b> 81 Carlton Road Waban, MA 02468	1
<b>Mr. Conard Curry</b> SEAPROBE, Inc. 501 Pine Street Picayune, MS 39466	1
<b>Dr. Robert Dolan</b> Environmental Sciences Department University of Virginia Charlottesville, VA 22903	1

<b>Dr. Wayne Dunlap</b> Offshore Technology Research Center Texas A&M University 1200 Marine Dr. College Station, TX 77845	1
<b>Dr. Steve Elgar</b> Woods Hole Oceanographic Institution Mail Stop 11 Woods Hole, MA 02543	1
<b>Dr. Carl Friendrichs</b> Virginia Institute of Marine Sciences School of Marine Sciences College of William and Mary Gloucester Point, VA 23062-1346	1
<b>Dr. Marcelo Garcia</b> Department of Civil and Environmental Engineering University of Illinois at Urbana-Champaign 205 North Matthews Ave. Urbana, IL 61801	1
<b>Dr. Rocky Geyer</b> Mail stop 12 Woods Hole Oceanographic Institution Woods Hole, MA 02543	1
<b>Dr. John Goff</b> Institute for Geophysics University of Texas Bldg 600 4412 Spicewood Spring Road Austin, TX 78759	1
<b>Dr. Stephane Guyonic</b> DCE/GESMA BP 42 29240 Brest-Naval FRANCE	1
<b>Mr. Steven D. Haeger</b> Naval Oceanographic Office 1002 Balch Blvd Stennis Space Center, MS 39529	1

<b>Dr. Robert Holman</b> COAS-OSU 104 Ocean Admin. Bldg. Corvallis, OR 97331-5503	1
<b>Dr. Matthew Hulbert</b> Research Dynamics 1332 Pembroke Drive West Cjester, PA 19380	1
<b>Dr. Chris Jenkins</b> University of Sydney Ocean Sciences Institute NSW 2006, AUSTRALIA	1
<b>Dr. Joseph H. Kravitz</b> Office of Naval Research Code 322 GG 800 North Quincy Street Arlington, VA 22217-5660	1
<b>Dr. Homa Lee</b> USGS, M/S 999 345 Middlefield Road Menlo Park, CA 94025	1
<b>Mr. Stephen C. Lingsch</b> Naval Oceanographic Office 1002 Balch Blvd Stennis Space Center, MS 39529	1
<b>Mr. William C. Lingsch</b> Naval Oceanographic Office 1002 Balch Blvd Stennis Space Center, MS 39529	1
<b>Dr. Yuming Liu</b> Department of Ocean Engineering MIT Cambridge, MA 02139	1
<b>Dr. Lafe Maynard</b> SEAPROBE, Inc. 501 Pine Street Picayune, MS 39466	1

<b>Dr. Chiang C. Mei</b> Professor of Civil and Environmental Engineering MIT Cambridge, MA 02139	1
<b>Dr. Alan Niedoroda</b> URS 3676 Hartsfield Road Tallahassee, FL 32300	1
<b>Dr. Charles Nittrouer</b> School of Oceanography University of Washington Seattle, WA 98195	1
<b>Dr. Hal Olsen</b> Division of Engineering Colorado School of Mines 1610 Illinois Street Golden, CO 80401	1
<b>Dr. Jean H. Prevost</b> E-232, E-quad Princeton University Princeton, NJ 08544	1
<b>Dr. Christopher Reed</b> URS 3676 Hartsfield Road Tallahassee, FL 32303	1
<b>Dr. Michael Richardson</b> Naval Research Laboratory Code 7430 Stennis Space Center, MS 39529-5004	1
<b>Dr. Ruud Schuttenheim</b> NITG-TNO Geo-Marine and Coast Dept., P.O. Box 800015 2508 TA Utrecht NETHERLANDS	1
<b>Mr. Jehrome Stockstil</b> SEAPROBE Inc. 501 Pine Street Picayune, MS 39466	1



**Dr. Robert Stoll**  
Columbia University  
Lamont-Doherty Geological Obs.  
Palisades, NY 10964

1

**Dr. James Syvitski**  
INSTAAR  
University of Colorado  
1560 30<sup>th</sup> Street, Campus Box 450  
Boulder, CO 80309-0450

1

**Dr. Douglas G. Todoroff**  
Office of Naval Research  
Code 322 W  
800 North Quincy Street  
Arlington, VA 22217-5660

1

**Ms. Lisa Tubridy**  
Coastal System Station  
Science Technology, Analysis, and  
Special Operation Department, Code R12  
6703 West Highway 98  
Panama City, FL 32407

1

**Dr. Phillip Valent**  
Naval Research Laboratory  
Code 7401, Bldg. 1005  
Stennis Space Center, MS 39529

1

**Dr. Linwood Vincent**  
Office of Naval Research  
Code 321 CD  
800 North Quincy Street  
Arlington, VA 22217-5660

1

**Dr. Thomas Wever**  
Federal Armed Forces Underwater Acoustics  
And Marine Geophysics Research Institute  
FWG-323, Klausdorfer Weg 2-24  
24148 Kiel Germany

1

**Dr. Patricia Wiberg**  
Environmental Sciences Department  
University of Virginia  
Charlottesville, VA 22903

1

<b>Mr. Cees J. Wiersum</b> TNO Physics and Electronics Laboratory Operations Research and Business Management Or Studies Navy-Mine Warfare Oude Waalsdorperweg 63 PO Box 96864 2509 JG The Hague NETHERLANDS	1
<b>Dr. Roy Wilkens</b> Office of Naval Research Code 322 GG 800 North Quincy Street Arlington, VA 22217-5660	1
<b>Dr. Dick K.P. Yue</b> Department of Ocean Engineering MIT Cambridge, MA 02139	1
<b>Defense Technical Information Center</b> 8725 John J. Kingman Rd., STE 0944 FT. Belvoir, VA 22060-6218	2
<b>Dudley Knox Library, Code 013</b> Naval Postgraduate School Monterey, CA 93943-5100	2
<b>Research Office, Code 09</b> Naval Postgraduate School Monterey, CA 93943-5138	1
<b>Gordon Schacher</b> Naval Postgraduate School 589 Dyer Rd., Room 200A, Code JW Monterey, CA 93943	5
<b>William Kemple</b> Naval Postgraduate School 589 Dyer Rd., Room 200A, Code JW Monterey, CA 93943	1

**Shelley Gallup**  
Naval Postgraduate School  
589 Dyer Rd., Room 200A, Code JW  
Monterey, CA 93943

1

**John Pearson, (RADM Ret)**  
Naval Postgraduate School  
589 Dyer Rd., Room 200A  
Monterey, CA 93943

1